

Please type a plus sign (+) inside this box →

+

Approved for use through 09/30/00. OMB 0651-0032  
Patent and Trademark Office. U.S. DEPARTMENT OF COMMERCE  
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control numberUTILITY  
PATENT APPLICATION  
TRANSMITTAL

## APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

Attorney Docket No.

SAIC0004

Total Pages

First Named Inventor or Application Identifier

Lalgudi V. NATARAJAN

Express Mail Label No.

ADDRESS TO:

Assistant Commissioner for Patents

Box Patent Application  
Washington, D.C. 20231

- 1.
- ☒
- Fee Transmittal Form
- 
- (Submit an original, and a duplicate for fee processing)

- 2.
- ☒
- Specification Total Pages

59

- (preferred arrangement as set forth below)
- Descriptive title of the Invention
  - Cross References to Related Applications
  - Statement Regarding Fed sponsored R & D
  - Reference to Microfiche Appendix
  - Background of the Invention
  - Brief Summary of the Invention
  - Brief Description of the Drawings (if filed)
  - Detailed Description
  - Claim(s)
  - Abstract of the Disclosure

- 3.
- ☒
- Drawing(s) (35 usc 113) [Total Sheets]

30

- 4.
- ☒
- Oath or Declaration [Total Pages]

3

- a. ☐ Newly executed (original or copy)
- b. ☐ Copy from a prior application (37 CFR 1.63(d)) (for continuation/divisional with box 17 completed) [Note Box 5 below]
- i. ☐ DELETION OF INVENTOR(S)  
Signed statement attached  
deleting inventor(s) named in the prior application, See 37 CFR 1.63(d)(2) and 1.33(b)

- 5.
- ☐
- Incorporation By Reference (usable if Box 4b is checked)
- 
- The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.

- 6.
- ☐
- Microfiche Computer Program (Appendix)

7. Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary)

- a. ☐ Computer Readable Copy
- b. ☐ Paper Copy (identical to computer copy)
- c. ☐ Statement verifying identify of above copies

## ACCOMPANYING APPLICATION PARTS

8. ☐ Assignment Papers (cover sheet & document(s))
9. ☐ 37 CFR 3.73(b) Statement ☐ Power of Attorney  
(when there is an assignee)
10. ☐ English Translation Document (if applicable)
11. ☐ Information Disclosure Statement (IDS)/PTO-1449 ☐ Copies of IDS Citations
12. ☐ Preliminary Amendment (2 pages)
13. ☒ Return Receipt Postcard (MPEP 503)
14. ☐ Small Entity Statement ☐ Statement filed in prior application, Status still proper and desired
15. ☐ Certified Copy of Priority Document(s)  
(If foreign priority is claimed)
16. ☐ Other: .....

17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.:

## 18. CORRESPONDENCE ADDRESS

☐ Customer Number or Bar Code Labelor ☐ Correspondence address below

Name

George T. Marcou  
KILPATRICK STOCKTON LLP

Address

700 13th Street, N.W.  
Suite 800

City

Washington

State

DC

Zip Code

20005

Country

U.S.A.

Telephone

202-508-5800

Fax

202-508-5858

Name (Print/Type)

George T. Marcou

Reg. No.

33,014

Signature

Date

7/21/99

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, D.C. 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, D.C. 20231.

5                   **ELECTRICALLY SWITCHABLE POLYMER-DISPERSED LIQUID CRYSTAL  
MATERIALS INCLUDING SWITCHABLE OPTICAL COUPLERS AND  
RECONFIGURABLE OPTICAL INTERCONNECTS**

**CROSS-REFERENCE TO RELATED APPLICATIONS**

                  This application claims the benefit of U.S. Provisional Application 60/094,578,  
filed July 29, 1998.

10                   **BACKGROUND OF THE INVENTION**

**FIELD OF INVENTION**

15                   The present invention relates generally to electrically switchable polymer-  
dispersed liquid crystal holographic materials, and more specifically to switchable  
polymer-dispersed liquid crystal materials suitable for switchable optical coupling and  
reconfigurable optical interconnects.

**DESCRIPTION OF RELATED ART**

20                   Typical state-of-the-art holographic materials do not have an electro-optical nature  
which can be exploited for real time control of their optical properties. That is, once the  
hologram is fixed, its optical characteristics cannot be changed. Thus, it is seen that there  
is a need for materials that can record volume holograms with properties that can be  
electrically controlled.

25

                  Liquid crystals have long been utilized in the prior art for their ability to change  
their optical orientation in the presence of an electric field. Additionally, liquid crystals  
can dramatically increase the diffraction efficiency of a volume hologram of which they  
are a part. Together, these properties offer the very desirable possibility of electrically

switching the diffraction efficiency of volume holograms for use in a wide variety of optical information processing and display applications.

5 The prior art has attempted to combine the properties of liquid crystals with holograms by a variety of methods. Unfortunately, most of these prior art devices are complex to manufacture and are not successful at offering all the advantages of volume holographic gratings.

10 One approach for combining the advantages of liquid crystals with volume holographic gratings has been to first make a holographic transmission grating by exposing a photopolymerizable material with a conventional two-beam apparatus for forming interference patterns inside the material. After exposure, the material is processed to produce voids where the greatest amount of exposure occurred, that is, along the grating lines, and then, in a further step, the pores are infused with liquid crystals.  
15 Unfortunately, these materials are complex to manufacture and do not offer flexibility for *in situ* control over liquid crystal domain size, shape, density, or ordering.

Polymer-dispersed liquid crystals (PDLCs) are formed from a homogeneous mixture of prepolymer and liquid crystals. As the polymer cures, the liquid crystals  
20 separate out as a distinct microdroplet phase. If the polymer is a photopolymer, this phase separation occurs as the prepolymer is irradiated with light. If a photopolymerizable polymer-dispersed liquid crystal material is irradiated with light in a suitable pattern, a holographic transmission grating can be made inside the cured polymer comprising gratings of cured polymer separated by phase-separated liquid crystals. The  
25 prior art has attempted to employ polymer-dispersed liquid crystal materials for writing volume gratings, but, despite a variety of approaches, has not been able to achieve high efficiency in the Bragg regime, high density (small grating spacing) capability, or low voltage ( $<100$  Vrms) switching for films in the range of 15 microns thickness. The inability to make an electrically switchable volume hologram that can be switched at  
30 voltages less than 100 volts has been a particular deficiency in the prior art in that lower

voltages are necessary to be compatible with conventional display and information processing technology.

It is, therefore, a principal object of the present invention to provide an improved  
5 polymer-dispersed liquid crystal system suitable for recording volume holograms.

It is a particular object of the present invention to provide a polymer-dispersed liquid crystal system that has a fast curing rate to produce small liquid crystal droplets, particularly in the range of 0.01-0.05 microns, for greater clarity of any resulting film and  
10 for writing finer gratings.

It is another object of the present invention to provide a single-step, fast holographic recording material.

It is a further object of the present invention to provide electrically switchable  
15 volume holograms that can be switched at voltages less than 100 volts.

It is also an object of the present invention to provide an improved polymer-dispersed liquid crystal system suitable for recording reflection gratings, including, in particular, switchable reflection gratings.  
20

It is also an object of the present invention to provide an improved polymer-dispersed liquid crystal system suitable for recording subwavelength gratings, including, in particular, switchable subwavelength gratings.  
25

These and other objects of the present invention will become apparent as the description of certain representative embodiments proceeds.

### **BRIEF SUMMARY OF THE INVENTION**

30

5 The present invention provides a novel photopolymerizable material for single-step, fast recording of volume holograms with properties that can be electrically controlled. The unique discovery of the present invention is a new homogeneous mixture of a nematic liquid crystal and a multifunctional pentaacrylate monomer, with a photoinitiator, a coinitiator and a cross-linking agent, that accomplishes the objects of the invention, particularly the object of fast curing speed and small liquid crystal droplet size.

10 Accordingly, the present invention is directed to a polymer-dispersed liquid crystal ("PDLC") material, comprising the monomer dipentaerythritol hydroxypentaacrylate, a liquid crystal, a cross-linking monomer, a coinitiator and a photoinitiator dye. The polymer-dispersed liquid crystal material may optionally further comprise a surfactant. The PDLC material may be approximately 10-40 wt% of the liquid crystal. The PDLC material may be approximately 5-15 wt% of the cross-linking monomer. The amount of the coinitiator may be  $10^{-3}$  to  $10^{-4}$  gram moles and the amount of the photoinitiator dye may be  $10^{-5}$  to  $10^{-6}$  gram moles. The surfactant, when present, may be up to approximately 6 wt% of the PDLC material.

20 The present invention is also directed to an electrically switchable hologram, comprising a pair of transparent plates, and sandwiched between the transparent plates, a volume hologram made by exposing an interference pattern inside a polymer-dispersed liquid crystal material, the polymer-dispersed liquid crystal material comprising, before exposure, the monomer dipentaerythritol hydroxypentaacrylate, a liquid crystal, a cross-linking monomer, a coinitiator and a photoinitiator dye. The electrically switchable hologram may optionally further comprise a surfactant.

25 The present invention is additionally directed to a method for reducing the switching voltage needed to switch the optical orientation of liquid crystals in a polymer-dispersed liquid crystal material, comprising the step of using alternating current switching voltage frequencies greater than 1000 Hz.

30

5 The present invention is additionally directed to a switchable slanted transmission grating comprising a polymer-dispersed liquid crystal material disposed between at least two optically transparent electrode plates, wherein the polymer-dispersed liquid crystal material is constructed by exposing to light in an interference pattern a mixture comprising, before exposure: (a) a polymerizable monomer comprising at least one acrylate; (b) at least one liquid crystal; (c) a chain-extending monomer; (d) a coinitiator; and (e) a photoinitiator.

10 The present invention is additionally directed to an optical coupling device comprising: at least one switchable slanted transmission grating and at least one voltage source associated with said switchable slanted transmission grating.

15 The present invention is additionally directed to a method for preparing a switchable slanted transmission grating, comprising: disposing between at least two optically transparent electrode plates a mixture that comprises, before exposure: (a) a polymerizable monomer comprising at least one acrylate; (b) a liquid crystal; (c) a chain-extending monomer; (d) a coinitiator; and (e) a photoinitiator; and exposing this mixture to light in an interference pattern.

20 The present invention is additionally directed to a method for preparing an optical coupling device comprising constructing a switchable slanted transmission grating, and electrically connecting said optically transparent electrodes to a voltage source.

25 It is a feature of the present invention that a very clear and orderly separation of liquid crystal from cured polymer results, so as to produce high quality holographic transmission gratings. The prior art has achieved generally only a distribution of large and small liquid crystal domains and not the clear, orderly separation made possible by the present invention.

It is also a feature of the present invention that volume Bragg gratings with small grating spacings (approximately 4,000 lines per mm) can be recorded.

It is another feature of the present invention that *in situ* control of domain size,  
5 shape, density, and ordering is allowed.

It is yet another feature of the present invention that holograms can be recorded using conventional optical equipment and techniques.

10 It is a further feature of the present invention that a unique photopolymerizable prepolymer material is employed. This unique material can be used to record holograms in a single step.

It is also a feature of the present invention that the PDLC material has an  
15 anisotropic spatial distribution of phase-separated liquid crystal droplets within a photochemically-cured polymer matrix.

It is an advantage of the present invention that single-step recording is nearly immediate and requires no later development or further processing.

20

It is another advantage of the present invention that uses thereof are not limited to transmission gratings, but can be extended to other holograms such as optical storage devices and reflection and transmission pictorial holograms.

25 It is also an advantage that, unlike holograms made with conventional photograph-type films or dichromated gels, holograms in accordance with the present invention can be exposed in a one-step process that requires little or no further processing.

It is a further advantage of the present invention that reflection, transmission and pictorial holograms made using the teachings provided herein can be switched on and off.

It is also an advantage of the present invention that switchable reflection gratings  
5 can be formed using positive and negative dielectric anisotropy liquid crystals.

These and other features and advantages of the present invention will become apparent as the description of certain representative embodiments proceeds.

10 **BRIEF DESCRIPTION OF THE SEVERAL VIEWS OF THE DRAWINGS**

The present invention will be more clearly understood from a reading of the following detailed description in conjunction with the accompanying figures wherein:

15 FIG. 1 is a cross-sectional view of an electrically switchable hologram made of an exposed polymer-dispersed liquid crystal material according to the teachings of the present invention;

FIG. 2 is a graph of the normalized net transmittance and normalized net  
20 diffraction efficiency of a hologram made according to the teachings of the present invention (without the addition of a surfactant) versus the rms voltage applied across the hologram;

FIG. 3 is a graph of both the threshold and complete switching rms voltages  
25 needed for switching a hologram made according to the teachings of the present invention to minimum diffraction efficiency versus the frequency of the rms voltage;

FIG. 4 is a graph of the normalized diffraction efficiency as a function of the applied electric field for a PDLC material formed with 34% by weight liquid crystal



surfactant present and a PDLC material formed with 29% by weight liquid crystal and 4% by weight surfactant;

FIG. 5 is a graph showing the switching response time data for the diffracted beam in the surfactant-containing PDLC material in FIG. 5;

FIG. 6 is a graph of the normalized net transmittance and the normalized net diffraction efficiency of a hologram made according to the teachings of the present invention versus temperature;

FIG. 7 is an elevational view of a typical experimental arrangement for recording reflection gratings;

FIGS 8a and 8b are elevational views of a reflection grating in accordance with the present invention having periodic planes of polymer channels and PDLC channels disposed parallel to the front surface in the absence of a field (FIG. 8a) and with an electric field applied (FIG. 8b) wherein the liquid crystal utilized in the formation of the grating has a positive dielectric anisotropy;

FIGS. 9a and 9b are elevational views of a reflection grating in accordance with the invention having periodic planes of polymer channels and PDLC channels disposed parallel to the front surface of the grating in the absence of an electric field (FIG. 9a) and with an electric field applied (FIG. 9b) wherein the liquid crystal utilized in the formation of the grating has a negative dielectric anisotropy;

FIG. 10a is an elevational view of a reflection grating in accordance with the invention disposed within a magnetic field generated by Helmholtz coils;

FIGS. 10b and 10c are elevational views of the reflection grating of FIG. 10a in the absence of an electric field (FIG. 10b) and with an electric field applied (FIG. 10c);

FIGS. 11a and 11b are representative side views of a slanted transmission grating (FIG. 11a) and a slanted reflection grating (FIG. 11b) showing the orientation of the grating vector  $G$  of the periodic planes of polymer channels and PDLC channels;

5

FIG. 12 is an elevational view of a reflection grating formed in accordance with the invention while a shear stress field is applied;

FIG. 13 is an elevational view of a subwavelength grating in accordance with the present invention having periodic planes of polymer channels and PDLC channels disposed perpendicular to the front surface of the grating;

FIG. 14a is an elevational view of a switchable subwavelength grating in accordance with the present invention wherein the subwavelength grating functions as a half wave plate whereby the polarization of the incident radiation is rotated by  $90^\circ$ ;

FIG. 14b is an elevational view of the switchable half wave plate shown in FIG. 14a disposed between crossed polarizers whereby the incident light is transmitted;

FIGS. 14c and 14d are side views of the switchable half wave plate and crossed polarizers shown in FIG. 14b showing the effect of the application of a voltage to the plate whereby the polarization of the light is no longer rotated and thus blocked by the second polarizer;

FIG. 15a is a side view of a switchable subwavelength grating in accordance with the invention wherein the subwavelength grating functions as a quarter wave plate whereby plane polarized light is transmitted through the subwavelength grating, retroreflected by a mirror and reflected by the beam splitter;

FIG. 15b is a side view of the switchable subwavelength grating of FIG. 15a showing the effect of the application of a voltage to the plate whereby the polarization of the light is no longer modified, thereby permitting the reflected light to pass through the beam splitter;

5

FIG. 16a and 16b are elevational views of a subwavelength grating in accordance with the present invention having periodic planes of polymer channels and PDLC channels disposed perpendicular to the front face of the grating in the absence of an electrical field (FIG. 16a) and with an electric field applied (FIG. 16b) wherein the liquid crystal utilized in formation of the grating has a positive dielectric anisotropy;

10

FIG. 17 is a side view of five subwavelength gratings wherein the gratings are stacked and connected electrically in parallel thereby reducing the switching voltage of the subwavelength grating;

15

FIG. 18 is a cross sectional view of the prism system and geometric arrangement for forming highly slanted transmission gratings in accordance with the present invention;

FIG. 19 is a cross sectional view of a switchable highly slanted transmission grating in accordance with the present invention;

20

FIG. 20 is a representative side view of a switchable highly slanted transmission grating coupled to a substrate in the absence of an applied field;

FIG. 21 is a representative side view of a switchable highly slanted transmission grating coupled as an input to a substrate;

25

FIG. 22 is a representative side view of a switchable highly slanted transmission grating coupled as an input to a substrate in the presence of an applied field;

30

FIG. 23 is a representative side view of a switchable highly slanted transmission grating coupled as an output to a substrate in the absence of an applied field;

FIG. 24 is a representative side view of a highly slanted transmission grating coupled as an output to a substrate in the presence of an applied field;

FIG. 25 is a representative side view of a first highly slanted transmission grating coupled as an input to a substrate and a second highly slanted transmission grating coupled as an output to a substrate;

FIG. 26 is a representative side view of a selectively adjustable and reconfigurable one-to-many fan-out optical interconnect in accordance with the present invention;

FIG. 27 is a graph of the electrical switching of a highly slanted transmission grating;

FIG. 28 is a graph of the electrical switching time response of a highly slanted grating for a 97V step voltage;

FIG. 29 is a graph of the relaxation of a slanted grating when a switching field of 97 V step voltage was turned off; and

FIG. 30 is a graph of the time response of a slanted grating with higher switching voltages.

### **DETAILED DESCRIPTION OF THE INVENTION**

In accordance with the present invention there is provided a polymer-dispersed liquid crystal ("PDLC") material comprising a monomer, a dispersed liquid crystal, a cross-linking monomer, a coinitiator and a photoinitiator dye. These PDLC materials

exhibit clear and orderly separation of the liquid crystal and cured polymer, whereby the PDLC material advantageously provides high quality holographic gratings. The PDLC materials of the present invention are also advantageously formed in a single step. The present invention also utilizes a unique photopolymerizable prepolymer material that permits *in situ* control over characteristics of the resulting gratings, such as domain size, shape, density, ordering, and the like. Furthermore, methods and materials of the present invention can be used to prepare PDLC materials that function as switchable transmission or reflection gratings.

Polymer-dispersed liquid crystal materials, methods, and devices contemplated for use in the practice of the present invention are also described in R.L. Sutherland et al., "Bragg Gratings in an Acrylate Polymer Consisting of Periodic Polymer-Dispersed Liquid-Crystal Planes," *Chemistry of Materials*, No. 5, pp. 1533-1538 (1993); in R.L. Sutherland et al., "Electrically switchable volume gratings in polymer-dispersed liquid crystals," *Applied Physics Letters*, Vol. 64, No. 9, pp. 1074-1076 (1984); and T.J. Bunning et al., "The Morphology and Performance of Holographic Transmission Gratings Recorded in Polymer-Dispersed Liquid Crystals," *Polymer*, Vol. 36, No. 14, pp. 2699-2708 (1995), G.S. Iannacchino, et al., *Europhys. Lett.* 36, 425 (1996); and V. P. Tondiglia, et al. *Opt. Lett.* 20, pp. 1325-1327 (1995) all of which are fully incorporated by reference into this Detailed Description of the Invention. Copending patent applications Serial Nos. 08/273,436 and 08/273,437, Sutherland et al., titled "Switchable Volume Hologram Materials and Devices," and "Laser Wavelength Detection and Energy Dosimetry Badge," respectively, include background material on the formation of transmission gratings inside volume holograms. Reference is also made to copending Application Serial Nos. 09/033,513, 09/033,512, 09/033,514 and 09/034,014, also incorporated herein.

The process by which a hologram is formed according to the invention is controlled primarily by the choice of components used to prepare the homogeneous starting mixture, and to a lesser extent by the intensity of the incident light pattern. The

preferred polymer-dispersed liquid crystal ("PDLC") material employed in the practice of the present invention creates a switchable hologram in a single step. A new feature of the preferred PDLC material is that illumination by an inhomogeneous, coherent light pattern initiates a patterned, anisotropic diffusion (or counter diffusion) of polymerizable monomer and second phase material, particularly liquid crystal ("LC") for this application. Thus, alternating well-defined channels of second phase-rich material, separated by well-defined channels of nearly pure polymer, are produced in a single-step process.

The resulting preferred PDLC material has an anisotropic spatial distribution of phase-separated LC droplets within the photochemically cured polymer matrix. Prior art PDLC materials made by a single-step process can achieve at best only regions of larger LC bubbles and smaller LC bubbles in a polymer matrix. The large bubble sizes are highly scattering which produces a hazy appearance and multiple order diffractions, in contrast to the well-defined first order diffraction and zero order diffraction made possible by the small LC bubbles of the preferred PDLC material in well-defined channels of LC-rich material. Reasonably well-defined alternately LC-rich channels and nearly pure polymer channels in a PDLC material are possible by multi-step processes, but such processes do not achieve the precise morphology control over LC droplet size and distribution of sizes and widths of the polymer and LC-rich channels made possible by the preferred PDLC material.

The sample is prepared by coating the mixture between two indium-tin-oxide (ITO) coated glass slides separated by spacers of nominally 10-20  $\mu\text{m}$  thickness. The sample is placed in a conventional holographic recording setup. Gratings are typically recorded using the 488 nm line of an argon ion laser with intensities of between about 0.1-100  $\text{mW}/\text{cm}^2$  and typical exposure times of 30-120 seconds. The angle between the two beams is varied to vary the spacing of the intensity peaks, and hence the resulting grating spacing of the hologram. Photopolymerization is induced by the optical intensity pattern. A more detailed discussion of an exemplary recording apparatus can be found in

R.L. Sutherland, et al., "Switchable Holograms in New Photopolymer-Liquid Crystal Composite Materials," Society of Photo-Optical Instrumentation Engineers (SPIE), Proceedings Reprint, Volume 2404, reprinted from Diffractive and Holographic Optics Technology II (1995), incorporated herein by reference.

5

The features of the PDLC material are influenced by the components used in the preparation of the homogeneous starting mixture and, to a lesser extent, by the intensity of the incident light pattern. In a preferred embodiment, the prepolymer material comprises a mixture of a photopolymerizable monomer, a second phase material, a photoinitiator dye, a coinitiator, a chain extender (or cross-linker), and, optionally, a surfactant.

In the preferred embodiment, the two major components of the prepolymer mixture are the polymerizable monomer and the second phase material, which are preferably completely miscible. Highly functionalized monomers are preferred because they form densely cross-linked networks which shrink to some extent and tend to squeeze out the second phase material. As a result, the second phase material is moved anisotropically out of the polymer region and, thereby, separated into well-defined polymer-poor, second phase-rich regions or domains. Highly functionalized monomers are also preferred because the extensive cross-linking associated with such monomers yields fast kinetics, allowing the hologram to form relatively quickly, whereby the second phase material will exist in domains of less than approximately 0.1  $\mu\text{m}$ .

Highly functionalized monomers, however, are relatively viscous. As a result, these monomers do not tend to mix well with other materials, and they are difficult to spread into thin films. Accordingly, it is preferable to utilize a mixture of pentaacrylates in combination with di-, tri-, and/or tetra-acrylates in order to optimize both the functionality and viscosity of the prepolymer material. Suitable acrylates, such as triethyleneglycol diacrylate, trimethylolpropane triacrylate, pentaerythritol triacrylate, pentaerythritol tetraacrylate, pentaerythritol pentaacrylate, and the like can be used in

accordance with the present invention. In the preferred embodiment, it has been found that an approximately 1:4 mixture of tri- to pentaacrylate facilitates homogeneous mixing while providing a favorable mixture for forming 10-20  $\mu\text{m}$  films on the optical plates.

5           The second phase material of choice for use in the practice of the present invention is a liquid crystal. This also allows an electro-optical response for the resulting hologram. The concentration of LC employed should be large enough to allow a significant phase separation to occur in the cured sample, but not so large as to make the sample opaque or very hazy. Below about 20% by weight very little phase separation  
10       occurs and diffraction efficiencies are low. Above about 35% by weight, the sample becomes highly scattering, reducing both diffraction efficiency and transmission. Samples fabricated approximately 25% by weight typically yield good diffraction efficiency and optical clarity. In prepolymer mixtures utilizing a surfactant, the concentration of LC may be increased to 35% by weight without loss in optical  
15       performance by adjusting the quantity of surfactant. Suitable liquid crystals contemplated for use in the practice of the present invention include the mixture of cyanobiphenyls marketed as E7 by Merck, 4'-n-pentyl-4-cyanobiphenyl, 4'-n-heptyl-4-cyanobiphenyl, 4'-octaoxy-4-cyanobiphenyl, 4'-pentyl-4-cyanoterphenyl,  $\alpha$ -methoxybenzylidene-4'-butylaniline, and the like. Other second phase components are also possible.

20

          The preferred polymer-dispersed liquid crystal material employed in the practice of the present invention is formed from a prepolymer material that is a homogeneous mixture of a polymerizable monomer comprising dipentaerythritol hydroxypentaacrylate (available, for example, from Polysciences, Inc., Warrington, Pennsylvania),  
25       approximately 10-40 wt% of the liquid crystal E7 (which is a mixture of cyanobiphenyls marketed as E7 by Merck and also available from BDH Chemicals, Ltd., London, England), the chain-extending monomer N-vinylpyrrolidone ("NVP") (available from the Aldrich Chemical Company, Milwaukee, Wisconsin), coinitiator N-phenylglycine ("NPG") (also available from the Aldrich Chemical Company, Milwaukee, Wisconsin),  
30       and the photoinitiator dye rose bengal ester; (2,4,5,7-tetraiodo-3',4',5',6'-



tetrachlorofluorescein-6-acetate ester) marketed as RBAX by Spectragraph, Ltd., Maumee, Ohio). Rose bengal is also available as rose bengal sodium salt (which must be esterified for solubility) from the Aldrich Chemical Company. This system has a very fast curing speed which results in the formation of small liquid crystal micro-droplets.

5

The mixture of liquid crystal and prepolymer material are homogenized to a viscous solution by suitable means (e.g., ultrasonification) and spread between indium-tin-oxide ("ITO") coated glass slides with spacers of nominally 15-100  $\mu\text{m}$  thickness and, preferably, 10-20 $\mu\text{m}$  thickness. The ITO is electrically conductive and serves as an optically transparent electrode. Preparation, mixing and transfer of the prepolymer material onto the glass slides are preferably done in the dark as the mixture is extremely sensitive to light.

The sensitivity of the prepolymer materials to light intensity is dependent on the photoinitiator dye and its concentration. A higher dye concentration leads to a higher sensitivity. In most cases, however, the solubility of the photoinitiator dye limits the concentration of the dye and, thus, the sensitivity of the prepolymer material. Nevertheless, it has been found that for more general applications photoinitiator dye concentrations in the range of 0.2-0.4% by weight are sufficient to achieve desirable sensitivities and allow for a complete bleaching of the dye in the recording process, resulting in colorless final samples. Photoinitiator dyes that are useful in generating PDLC materials in accordance with the present invention are rose bengal ester (2,4,5,7-tetraiodo-3',4',5',6'tetrachlorofluorescein-6-acetate ester); rose bengal sodium salt; eosin; eosin sodium salt; 4,5-diiodosuccinyl fluorescein; camphorquinone; methylene blue, and the like. These dyes allow a sensitivity to recording wavelengths across the visible spectrum from nominally 400 nm to 700 nm. Suitable near-infrared dyes, such as cationic cyanine dyes with trialkylborate anions having absorption from 600-900 nm as well as merocyanine dyes derived from spiropyran should also find utility in connection with the present invention.

30

5 The coinitiator employed in the practice of the present invention controls the rate of curing in the free radical polymerization reaction of the prepolymer material. Optimum phase separation and, thus, optimum diffraction efficiency in the resulting PDLC material, are a function of curing rate. It has been found that favorable results can be achieved utilizing coinitiator in the range of 2-3% by weight. Suitable coinitiators include N-phenylglycine; triethylene amine; triethanolamine; N,N-dimethyl-2,6-diisopropyl aniline, and the like.

10 Other suitable dyes and dye coinitiator combinations that should be suitable for use in the present invention, particularly for visible light, include eosin and triethanolamine; camphorquinone and N-phenylglycine; fluorescein and triethanolamine; methylene blue and triethanolamine or N-phenylglycine; erythrosin B and triethanolamine; indolinocarbocyanine and triphenyl borate; iodobenzospiropyran and triethylamine, and the like.

15 The chain extender (or cross linker) employed in the practice of the present invention helps to increase the solubility of the components in the prepolymer material as well as to increase the speed of polymerization. The chain extender is preferably a smaller vinyl monomer as compared with the pentaacrylate, whereby it can react with the acrylate positions in the pentaacrylate monomer, which are not easily accessible to neighboring pentaacrylate monomers due to steric hindrance. Thus, reaction of the chain extender monomer with the polymer increases the propagation length of the growing polymer and results in high molecular weights. It has been found that a chain extender in general applications in the range of 10-18% by weight maximizes the performance in terms of diffraction efficiency. In the preferred embodiment, it is expected that suitable chain extenders can be selected from the following: N-vinyl pyrrolidone; N-vinyl pyridine; acrylonitrile; N-vinyl carbazole, and the like.

30 It has been found that the addition of a surfactant material, namely, octanoic acid, in the prepolymer material lowers the switching voltage and also improves the diffraction

efficiency. In particular, the switching voltage for PDLC materials containing a surfactant are significantly lower than those of a PDLC material made without the surfactant. While not wishing to be bound by any particular theory, it is believed that these results may be attributed to the weakening of the anchoring forces between the polymer and the phase-separated LC droplets. SEM studies have shown that droplet sizes in PDLC materials including surfactants are reduced to the range of 30-50 nm and the distribution is more homogeneous. Random scattering in such materials is reduced due to the dominance of smaller droplets, thereby increasing the diffraction efficiency. Thus, it is believed that the shape of the droplets becomes more spherical in the presence of a surfactant, thereby contributing to the decrease in switching voltage.

For more general applications, it has been found that samples with as low as 5% by weight of a surfactant exhibit a significant reduction in switching voltage. It has also been found that, when optimizing for low switching voltages, the concentration of surfactant may vary up to about 10% by weight (mostly dependent on LC concentration) after which there is a large decrease in diffraction efficiency, as well as an increase in switching voltage (possibly due to a reduction in total phase separation of LC). Suitable surfactants include octanoic acid; heptanoic acid; hexanoic acid; dodecanoic acid; decanoic acid, and the like.

In samples utilizing octanoic acid as the surfactant, it has been observed that the conductivity of the sample is high, presumably owing to the presence of the free carboxyl (COOH) group in the octanoic acid. As a result, the sample increases in temperature when a high frequency (~2 KHz) electrical field is applied for prolonged periods of time. Thus, it is desirable to reduce the high conductivity introduced by the surfactant, without sacrificing the high diffraction efficiency and the low switching voltages. It has been found that suitable electrically switchable gratings can be formed from a polymerizable monomer, vinyl neononanoate ("VN") ( $C_8H_{17}CO_2CH=CH_2$ ) commercially available from the Aldrich Chemical Co. in Milwaukee, Wisconsin). Favorable results have also been obtained where the chain extender N-vinyl pyrrolidone ("NVP") and the surfactant

octanoic acid are replaced by 6.5% by weight VN. VN also acts as a chain extender due to the presence of the reactive acrylate monomer group. In these variations, high optical quality samples were obtained with about 70% diffraction efficiency, and the resulting gratings could be electrically switched by an applied field of 6V/μm.

5

PDLC materials in accordance with the present invention may also be formed using a liquid crystalline bifunctional acrylate as the monomer ("LC monomer"). The LC monomers have an advantage over conventional acrylate monomers due to their high compatibility with the low molecular weight nematic LC materials, thereby facilitating formation of high concentrations of low molecular weight LC and yielding a sample with high optical quality. The presence of higher concentrations of low molecular weight LCs in the PDLC material greatly lowers the switching voltages (e.g., to ~2V/μm). Another advantage of using LC monomers is that it is possible to apply low AC or DC fields while recording holograms to pre-align the host LC monomers and low molecular weight LC so that a desired orientation and configuration of the nematic directors can be obtained in the LC droplets. The chemical formulae of several suitable LC monomers are as follows:

15

- $\text{CH}_2=\text{CH}-\text{COO}-(\text{CH}_2)_6\text{O}-\text{C}_6\text{H}_5-\text{C}_6\text{H}_5-\text{COO}-\text{CH}=\text{CH}_2$
- $\text{CH}_2=\text{CH}-(\text{CH}_2)_8-\text{COO}-\text{C}_6\text{H}_5-\text{COO}-(\text{CH}_2)_8-\text{CH}=\text{CH}_2$
- $\text{H}(\text{CF}_2)_{10}\text{CH}_2\text{O}-\text{CH}_2-\text{C}(=\text{CH}_2)-\text{COO}-(\text{CH}_2\text{CH}_2\text{O})_3\text{CH}_2\text{CH}_2\text{O}-\text{COO}-$   
 $\text{CH}_2-\text{C}(=\text{CH}_2)-\text{CH}_2\text{O}(\text{CF}_2)_{10}\text{H}$

20

Semifluorinated polymers are known to show weaker anchoring properties and also significantly reduced switching fields. Thus, it is believed that semifluorinated acrylate monomers which are bifunctional and liquid crystalline will find suitable application in the present invention.

25

Referring now to FIG. 1 of the drawings, there is shown a cross-sectional view of an electrically switchable hologram **10** made of an exposed polymer-dispersed liquid crystal material according to the teachings of the present invention. A layer **12** of the polymer-dispersed liquid crystal material is sandwiched between a pair of

indium-tin-oxide (ITO)coated glass slides 14 and spacers 16. The interior of hologram 10 shows the Bragg transmission gratings 18 formed when layer 12 was exposed to an interference pattern from two intersecting beams of coherent laser light. The exposure times and intensities can be varied depending on the diffraction efficiency and liquid crystal domain size desired. Liquid crystal domain size can be controlled by varying the concentrations of photoinitiator, coin initiator and chain-extending (or cross-linking) agent. The orientation of the nematic directors can be controlled while the gratings are being recorded by application of an external electric field across the ITO electrodes.

10 The scanning electron micrograph shown in FIG. 2 of the referenced *Applied Physics Letters* article and incorporated herein by reference is of the surface of a grating which was recorded in a sample with a 36 wt% loading of liquid crystal using the 488 nm line of an argon ion laser at an intensity of  $95 \text{ mW/cm}^2$ . The size of the liquid crystal domains is about  $0.2 \mu\text{m}$  and the grating spacing is about  $0.54 \mu\text{m}$ . This sample, which is approximately  $20 \mu\text{m}$  thick, diffracts light in the Bragg regime.

FIG. 2 is a graph of the normalized net transmittance and normalized net diffraction efficiency of a hologram made according to the teachings of the present invention versus the root mean square voltage ("Vrms") applied across the hologram.  $\Delta\eta$  is the change in first order Bragg diffraction efficiency.  $\Delta T$  is the change in zero order transmittance. FIG. 2 shows that energy is transferred from the first order beam to the zero-order beam as the voltage is increased. There is a true minimum of the diffraction efficiency at approximately 225 Vrms. The peak diffraction efficiency can approach 100%, depending on the wavelength and polarization of the probe beam, by appropriate adjustment of the sample thickness. The minimum diffraction efficiency can be made to approach 0% by slight adjustment of the parameters of the PDLC material to force the refractive index of the cured polymer to be equal to the ordinary refractive index of the liquid crystal.

By increasing the frequency of the applied voltage, the switching voltage for minimum diffraction efficiency can be decreased significantly. This is illustrated in FIG. 3, which is a graph of both the threshold rms voltage 20 and the complete switching rms voltage 22 needed for switching a hologram made according to the teachings of the present invention to minimum diffraction efficiency versus the frequency of the rms voltage. The threshold and complete switching rms voltages are reduced to 20 Vrms and 60 Vrms, respectively, at 10 kHz. Lower values are expected at even higher frequencies.

Smaller liquid crystal droplet sizes have the problem that it takes high switching voltages to switch their orientation. As described in the previous paragraph, using alternating current switching voltages at high frequencies helps reduce the needed switching voltage. As demonstrated in FIG. 4, another unique discovery of the present invention is that adding a surfactant (e.g., octanoic acid) to the prepolymer material in amounts of about 4%-6% by weight of the total mixture resulted in sample holograms with switching voltages near 50 Vrms at lower frequencies of 1 - 2 kHz. As shown in FIG. 5, it has also been found that the use of the surfactant with the associated reduction in droplet size, reduces the switching time of the PDLC materials. Thus, samples made with surfactant can be switched on the order of 25-44 microseconds. Without wishing to be bound by any theory, the surfactant is believed to reduce switching voltages by reducing the anchoring of the liquid crystals at the interface between liquid crystal and cured polymer.

Thermal control of diffraction efficiency is illustrated in FIG.6. FIG. 6 is a graph of the normalized net transmittance and normalized net diffraction efficiency of a hologram made according to the teachings of the present invention versus temperature.

The polymer-dispersed liquid crystal materials described herein successfully demonstrate the utility for recording volume holograms of a particular composition for such polymer-dispersed liquid crystal systems. Although the disclosed polymer-dispersed liquid crystal systems are specialized, the present invention will find application in other

areas where a fast curing polymer and a material that can be phase-separated from the polymer will find use.

As shown in FIG. 7, a PDLC reflection grating is prepared by placing several drops of the mixture of prepolymer material **112** on an indium-tin oxide ("ITO") coated glass slide **114a**. A second indium-tin oxide ("ITO") coated slide **114b** is then pressed against the first, thereby causing the prepolymer material **112** to fill the region between the slides **114a** and **114b**. Preferably, the separation of the slides is maintained at approximately 20  $\mu\text{m}$  by utilizing uniform spacers **118**. Preparation, mixing and transfer of the prepolymer material is preferably done in the dark. Once assembled, a mirror **11b** is placed directly behind the glass plate **114b**. The distance of the mirror from the sample is preferably substantially shorter than the coherence length of the laser. The PDLC material is preferably exposed to the 488 nm line of an argonion laser, expanded to fill the entire plane of the glass plate, with an intensity of approximately 0.1-100 mWatts/cm<sup>2</sup> with typical exposure times of 30-120 seconds. Constructive and destructive interference within the expanded beam establishes a periodic intensity profile through the thickness of the film.

In the preferred embodiment, the prepolymer material utilized to make a reflection grating comprises a monomer, a liquid crystal, a cross-linking monomer, a coiniciator, and a photoinitiator dye. In the preferred embodiment, the reflection grating is formed from prepolymer material comprising by total weight of the monomer dipentaerythritol hydroxypentaacrylate ("DPHA"), 34% by total weight of a liquid crystal comprising a mixture of cyanobiphenyls (known commercially as "E7"), 10% by total weight of a cross-linking monomer comprising N-vinylpyrrolidone ("NVP"), 2.5% 10 by weight of the coiniciator N-phenylglycine ("NPG"), and  $10^{-5}$  to  $10^{-6}$  gram moles of a photoinitiator dye comprising rose bengal ester. Further, as with transmission gratings, the addition of surfactants is expected to facilitate the same advantageous properties discussed above in connection with transmission gratings. It is also expected that similar ranges and

variation of prepolymer starting materials will find ready application in the formation of suitable reflection gratings.

It has been determined by low voltage, high resolution scanning electron  
5 microscopy ("LVHRSEM") that the resulting material comprises a fine grating with a  
periodicity of 165nm with the grating vector perpendicular to the plane of the surface.  
Thus, as shown schematically in FIG. 8a, grating **130** includes periodic planes of polymer  
channels **130a** and PDLC channels **130b** which run parallel to the front surface **134**. The  
grating spacing associated with these periodic planes remains relatively constant  
10 throughout the full thickness of the sample from the air/film to the film/substrate  
interface.

Although interference is used to prepare both transmission and reflection gratings,  
the morphology of the reflection grating differs significantly. In particular, it has been  
15 determined that, unlike transmission gratings with similar liquid crystal concentrations,  
very little coalescence of individual droplets was evident. Furthermore, the droplets that  
were present in the material were significantly smaller, having diameters between 50 and  
100 nm. Furthermore, unlike transmission gratings where the liquid crystal-rich regions  
typically comprise less than 40% of the grating, the liquid crystal-rich component of a  
20 reflection grating is significantly larger. Due to the much smaller periodicity associated  
with reflection gratings, i.e., a narrower grating spacing (~0.2 microns), it is believed that  
the time difference between completion of curing in high intensity versus low intensity  
regions is much smaller. Thus, gelation occurs more quickly and droplet growth is  
minimized. It is also believed that the fast polymerization, as evidenced by small droplet  
25 diameters, traps a significant percentage of the liquid crystal in the matrix during gelation  
and precludes any substantial growth of large droplets or diffusion of small droplets into  
larger domains.

Analysis of the reflection notch in the absorbance spectrum supports the  
30 conclusion that a periodic refractive index modulation is disposed through the thickness






of the film. In PDLC materials that are formed with the 488nm line of an argon ion laser, the reflection notch typically has a reflection wavelength at approximately 472 nm for normal incidence and a relatively narrow bandwidth. The small difference between the writing wavelength and the reflection wavelength (approximately 5%) indicates that shrinkage of the film is not a significant problem. Moreover, it has been found that the performance of such gratings is stable over periods of many months.


In addition to the materials utilized in the preferred embodiment described above, it is believed that suitable PDLC materials could be prepared utilizing monomers such as triethyleneglycol diacrylate, trimethylolpropanetriacrylate, pentaerythritol triacrylate, pentaerythritol tetraacrylate, pentaerythritol pentaacrylate, and the like. Similarly, other coinitiators such as triethylamine, triethanolamine, N,N-dimethyl-2,6-diisopropylaniline, and the like could be used instead of N-phenyl glycine. Where it is desirable to use the 458 nm, 476 nm, 488 nm or 514 nm lines of an argon ion laser, the photoinitiator dyes rose bengal sodium salt, eosin, eosin sodium salt, fluorescein sodium salt and the like will give favorable results. Where the 633 nm line is utilized, methylene blue will find ready application. Finally, it is believed that other liquid crystals, such as 4'-pentyl-4-cyanobiphenyl or 4'-heptyl-4-cyanobiphenyl, can be utilized in accordance with the invention.

Referring again to FIG. 8a, there is shown an elevational view of a reflection grating **130** in accordance with the invention having periodic planes of polymer channels **130a** and PDLC channels **130b** disposed parallel to the front surface **134** of the grating **130**. The symmetry axis **136** of the liquid crystal domains is formed in a direction perpendicular to the periodic channels **130a** and **130b** of the grating **130** and perpendicular to the front surface **134** of the grating **130**. Thus, when an electric field **E** is applied, as shown in FIG. 8b, the symmetry axis **136** is already in a low energy state in alignment with the field **E** and will not reorient. Thus, reflection gratings formed in accordance with the procedure described above will not normally be switchable.




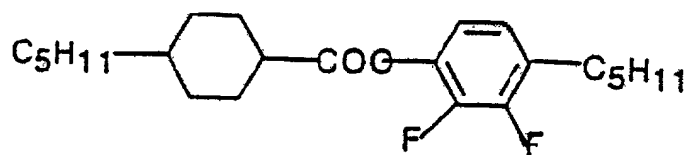

Liquid crystals can be found in nature (or synthesized) with either positive  
 5 or negative  $\Delta\epsilon$ . Thus, in more detailed aspects of the invention, it is possible to use a LC  
 which has a positive  $\Delta\epsilon$  at low frequencies, but becomes negative at high frequencies. The  
 frequency (of the applied voltage) at which  $\Delta\epsilon$  changes sign is called the cross-over  
 frequency. The cross-over frequency will vary with LC composition, and typical values  
 range from 1-10 kHz. Thus, by operating at the proper frequency, the reflection grating  
 10 may be switched. In accordance with the invention, it is expected that low crossover  
 frequency materials can be prepared from a combination of positive and negative  
 dielectric anisotropy liquid crystals. A suitable positive dielectric liquid crystal for use in  
 such a combination contains four ring esters as shown below:

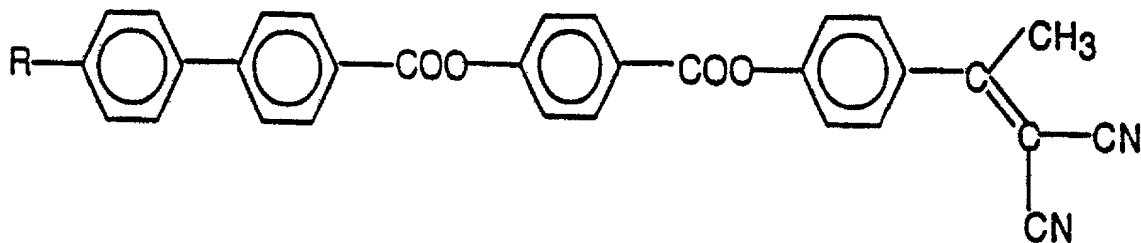

A strongly negative dielectric liquid crystal suitable for use in such a combination is made up of pyridazines as shown below:

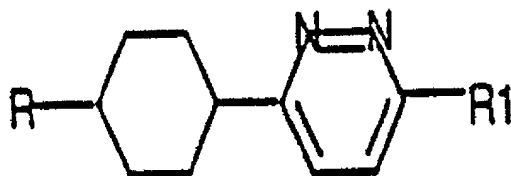

5

Both liquid crystal materials are available from LaRoche & Co., Switzerland. By varying the proportion of the positive and negative liquid crystals in the combination, crossover frequencies from 1.4-2.3 kHz are obtained at room temperature. Another combination suitable for use in the present embodiment is a combination of the following: p-pentylphenyl-2-chloro-4-(p-pentylbenzoyloxy) benzoate and benzoate. These materials are available from Kodak Company.

In still more detailed aspects of the invention, switchable reflection gratings can be formed using positive  $\Delta\epsilon$  liquid crystals. As shown in FIG. 10a, such gratings are formed by exposing the PDLC starting material to a magnetic field during the curing process. The magnetic field can be generated by the use of Helmholtz coils (as shown in FIG. 10a), the use of a permanent magnet, or other suitable means. Preferably, the

magnetic field  $\mathbf{M}$  is oriented parallel to the front surface of the glass plates (not shown) that are used to form the grating **140**. As a result, the symmetry axis **146** of the liquid crystals will orient along the field while the mixture is fluid. When polymerization is complete, the field may be removed and the alignment of the symmetry axis of the liquid crystals will remain unchanged. (See FIG. 10b.) When an electric field is applied, as shown in FIG. 10c, the positive  $\Delta\epsilon$  liquid crystal will reorient in the direction of the field, which is perpendicular to the front surface of grating and to the periodic channels of the grating.

FIG. 11a depicts a slanted transmission grating **148** and FIG. 11b depicts a slanted reflection grating **150**. A holographic transmission grating is considered slanted if the direction of the grating vector  $\mathbf{G}$  is not parallel to the grating surface. In a holographic reflection grating, the grating is said to be slanted if the grating vector  $\mathbf{G}$  is not perpendicular to the grating surface. Slanted gratings have many of the same uses as nonslanted gratings such as visual displays, mirrors, line filters, optical switches, and the like.

Primarily, slanted holographic gratings are used to control the direction of a diffracted beam. For example, in reflection holograms a slanted grating is used to separate the specular reflection of the film from the diffracted beam. In a PDLC holographic grating, a slanted grating has an even more useful advantage. The slant allows the modulation depth of the grating to be controlled by an electric field when using either tangential or homeotropic aligned liquid crystals. This is because the slant provides components of the electric field in the directions both tangential and perpendicular to the grating vector. In particular, for the reflection grating, the LC domain symmetry axis will be oriented along the grating vector  $\mathbf{G}$  and can be switched to a direction perpendicular to the film plane by a longitudinally applied field  $\mathbf{E}$ . This is the typical geometry for switching of the diffraction efficiency of a slanted reflection grating.

When recording slanted reflection gratings, it is desirable to place the sample between the hypotenuses of two right-angle glass prisms. Neutral density filters can then be placed in optical contact with the back faces of the prisms using index matching fluids so as to frustrate back reflections which would cause spurious gratings to also be recorded. The incident laser beam is split by a conventional beam splitter into two beams which are then directed to the front faces of the prisms, and then overlapped in the sample at the desired angle. The beams thus enter the sample from opposite sides. This prism coupling technique permits the light to enter the sample at greater angles. The slant of the resulting grating is determined by the angle at which the prism assembly is rotated (i.e., the angle between the direction of one incident beam and the normal to the prism front face at which that beam enters the prism).

As shown in FIG. 12, switchable reflection gratings may be formed in the presence of an applied shear stress field. In this method, a shear stress would be applied along the direction of a magnetic field  $\mathbf{M}$ . This could be accomplished, for example, by applying equal and opposite tensions to the two ITO coated glass plates which sandwich the prepolymer mixture while the polymer is still soft. This shear stress would distort the LC domains in the direction of the stress, and the resultant LC domain symmetry axis will be preferentially along the direction of the stress, parallel to the PDLC planes and perpendicular to the direction of the applied electric field for switching.

Reflection gratings prepared in accordance with the teachings of the present invention will find application in color reflective displays, switchable wavelength filters for laser projection, and the like.

As described herein, a holographic grating may be formed by overlapping two interfering incident beams in a sample. Similarly, a slanted grating can be prepared by overlapping the beams so that the angle of incidence of the first beam with respect to a normal from the sample is different from the angle of incidence of the second beam. In recording a slanted reflection grating the beams preferably enter the sample from opposite

66620" 69EE60  
sides. In recording a slanted transmission grating, however, the beams enter the sample from the same side. The resulting slant of the grating,  $1/2(\theta_{\text{ref}} - \theta_{\text{obj}})$ , will be related to the angle between the incident beams. In certain applications, it may be desirable to prepare slanted gratings in which the grating vector **G** is disposed at a large angle to the grating surface. Such gratings are referred to as highly slanted gratings.

In preparing highly slanted gratings, it is desirable to dispose the first incident beam at a large angle of incidence with respect to the second beam, which is directed along a normal to the sample. However, this arrangement may result in undesirable reflection losses in the first beam, which may affect the balance between the intensity of the incident beams and the resulting index modulation. Therefore, it may be desirable to reduce these reflection losses by directing the incident beam through a prism assembly as shown in FIG. 18.

In the particular arrangement shown in FIG. 18, two right angle prisms are combined into an assembly that is adapted to reduce reflection losses. This assembly is disposed on the surface of the sample. It is desirable to utilize an index matching fluid between the prisms and between the prism assembly and the sample in order to minimize reflections. The prisms are advantageously selected so that the first, object beam may be directed at a normal to one of the prisms (corresponding to a normal to the sample) and the second, reference beam can be directed at a normal to the other prism (corresponding to the desired angle to the sample). Neutral density filters can then be placed in optical contact with the back faces of the prisms using index matching fluids so as to frustrate back reflections which would cause spurious gratings to also be recorded. The incident laser beam is split by a conventional beam splitter into two beams which are then directed to the front faces of the prisms, and then overlapped in the sample at the desired angle. The beams thus enter the sample from the same side and the prism assembly advantageously reduces spurious reflections.

666620 597930

A switchable slanted transmission grating made in accordance with the present invention is shown in FIG. 19. Light of a wavelength that is matched to the Bragg condition will be diffracted into the -1-order by the grating and deflected by an angle  $2\theta_s$ , where  $\theta_s$  or  $\theta_{\text{slant}}$  is the slant angle of the grating. When a voltage is applied, the index modulation of the grating is reduced and the incident radiation can pass through the grating.

As shown in FIGS. 20-22, switchable slanted transmission gratings in accordance with the present invention can be utilized as holographic optical elements (HOEs), and, more particularly, as switchable optical coupling devices. In the system shown in FIGS. 20-22, a switchable slanted transmission grating is placed in optical contact with a transparent substrate. The substrate is preferably a thick transparent medium, such as glass, so that the light guided by total internal reflection (TIR) follows a path determined primarily by geometric optics rather than in a waveguide mode (which would occur for a thin film of thickness comparable to the optical wavelength). In the system shown in FIGS. 20-22, the grating has a slant angle,  $\theta_s$  or  $\theta_{\text{slant}}$ , and the substrate has a critical angle,  $\theta_c$ , for total internal reflection. If, as shown in FIGS. 20-21, the condition  $2\theta_{\text{slant}} > \theta_c$ , is satisfied, then the input light will be diffracted into the substrate where it will be subjected to total internal reflection. Moreover, if a voltage is applied to the switchable slanted transmission grating, as shown in FIG. 22, the diffraction efficiency of the grating can be modified so that the incident light will be transmitted through the grating. Thus, by applying a voltage, the system shown in FIGS. 20-21 can be selectively switched out of the TIR substrate mode. In addition, by varying the applied voltage and the corresponding diffraction efficiency of the grating, the amount of light diffracted into the substrate can be selectively controlled.

Referring now to FIGS. 23 and 24, a switchable slanted transmission grating may similarly be utilized as an output coupling device. As shown in FIG. 23, a switchable slanted transmission grating may be placed in optical contact with a transparent substrate



at a point where light is totally internally reflected within the substrate, so that the light will be diffracted out of the substrate. Where a voltage is applied to the switchable slanted transmission grating, as shown in FIG. 24, the diffraction efficiency of the grating can be modified so that the incident light will not be diffracted through the grating. More detailed aspects of such output coupling devices are discussed in connection with the discussion of FIGS. 25 and 26.

Where a slanted grating is to be used for optical coupling to a substrate, it is often desirable to select the angle of the slant and to match the index of the grating to that of the substrate. Moreover, it will be appreciated that the application of an anti-reflective coating to the grating will advantageously reduce spurious reflections. It will also be appreciated that the polymer-dispersed liquid crystal material may be selected so that the diffraction efficiency of the grating can be conveniently adjusted from 0 to 100% by the application of an electric field.

An example of a static one-to-many fan-out optical interconnect is given in an article entitled "Cross-link Optimized Cascaded Volume Hologram Array with Energy-equalized One-to-many Surface-normal Fan-outs," by J. Liu, C. Zhao, R. Lee, and R. T. Chen, Optics Letters, 22, pp. 1024-26 (1997), incorporated herein by reference.

As shown in FIGS. 25 and 26, however, switchable slanted transmission gratings can be used as optical couplers to form devices such as a selectively adjustable and reconfigurable one-to-many fan-out optical interconnect. A first input slanted transmission grating, such as the grating shown in FIG. 19, is disposed in optical contact with the substrate. At several points along the substrate where light reflects internally, additional output slanted transmission gratings, such as those shown in FIGS. 23-24, may be deposited with good optical contact so that the light may be diffracted out of the substrate. It will be appreciated that the slant angle,  $\theta_s$  or  $\theta_{\text{slant}}$ , of the output gratings is advantageously oriented at the opposite angle of the input grating. Individual voltage sources are preferably connected to the input and each of the output gratings.

As shown in the particular example in FIG. 25, the slant angle of the grating should exceed  $23^\circ$  so that the diffracted angle is  $46^\circ$  and greater than the  $41.3^\circ$  critical angle for the total internal reflection for the BK-7 glass substrate (having a refractive index of 1.52). This large slant allows light, normally incident on the waveguide, to be diffracted at such a large angle that the light becomes trapped inside the glass slab due to total internal reflection.

For a one-to-many fan-out optical interconnect having a total of  $N$  outputs of equal optical power, the diffraction efficiencies of each successive HOE is given by:

$$\eta_j = \frac{1}{N - j + 1}, (j = 1^{\text{K}}N)$$

Thus, light may be coupled into the substrate by a diffraction grating which deflects the light at an angle greater than the critical angle for TIR. The coupled light is guided along the substrate by TIR. At each output node some light is coupled out of the substrate by diffraction while the remainder continues to propagate down the substrate. Eventually all of the light may be coupled out of the substrate and sent to  $N$  other inputs, such as detectors, nodes of other switches, or the like. In such devices, it is desirable to control the diffraction efficiency to equalize the output power in each channel of the fan-out.

20

In static optical interconnects, it is difficult to control the diffraction efficiencies for a one-to-many fan-out. In particular, the holographic optical elements must be manufactured to exacting tolerances concerning their diffraction efficiency. Deviations from the required values result in either poor performance or rejection of the element and re-manufacture of the part. In particular, it is difficult to achieve a uniform fan-out energy distribution in such substrate guided-wave interconnects. In the present invention, the holographic optical elements can be manufactured with the same diffraction efficiency ( $\sim 100\%$ ) and voltage-tuned in real-time to achieve the desired diffraction efficiency. As a result, the yield and quality of such elements can be increased and the

ease of use is dramatically improved. Moreover, in devices incorporating static HOEs, it is difficult to adjust individual outputs and the configuration of the device. Typically such changes must be made mechanically by alteration of the existing HOEs or substitution of HOEs within the system. In particular, the same HOEs could not be used

5 in a general reconfiguration of a substrate guided-wave interconnect since the diffraction efficiencies would not be correct for equal power fan-out. Finally, it is desirable to incorporate an input HOE having a high diffraction efficiency, such as the switchable gratings of the present invention, into such devices.

10 Switchable polymer-dispersed liquid crystal materials in accordance with the invention have been advantageously utilized to provide electrically switchable substrate guidedwave optical interconnects. Advantageously, the diffraction efficiency of each HOE can be tuned electrically to achieve equal-power fan-out. This feature eases manufacturing tolerances. In addition, by adjusting the output of the HOEs, the system

15 can be reconfigured to display different fan-out, different outputs, different modules, or other configurational changes. Moreover, when a system is reconfigured, the diffraction efficiencies can be voltage-tuned to equalize the fan-out energy distribution, if desired.

In the example of a reconfigurable interconnect incorporating switchable HOEs in

20 accordance with the present invention shown in FIG. 26, each HOE is preferably fabricated with a nominal diffraction efficiency  $\eta \sim 100\%$ . Each HOE may then be individually voltage-tuned to a value  $\eta_j = (N-j+1)^{-1}$ , where, for example,  $N=9$ . If  $V_0 = V_{sw}$ , (where  $V_{sw}$  is the 100%-switching voltage), the fan-out is 1-to-0, i.e., no fan-out. If  $V_0 = 0$  such that  $\eta_0 = 100\%$ , the fan-out is 1-to- $N$ . Examples of reconfigurable voltage/fan-out

25 schemes corresponding to the reconfigurable substrate mode optical interconnect shown in FIG. 26 are set forth in the following table.

### Reconfigurable Fan-Out Scheme

1-to-9 Fan-Out	1-to-5 Fan-Out
$V_1 \quad \eta=11\%$	$V1' \quad \eta=20\%$
$V_2 \quad \eta=12\%$	$V_{sw} \quad \eta=0\%$
$V_3 \quad \eta=14\%$	$V3' \quad \eta=25\%$
$V_4 \quad \eta=16\%$	$V_{sw} \quad \eta=0\%$
$V_5 \quad \eta=20\%$	$V5' \quad \eta=33\%$
$V_6 \quad \eta=25\%$	$V_{sw} \quad \eta=0\%$
$V_7 \quad \eta=33\%$	$V7' \quad \eta=50\%$
$V_8 \quad \eta=50\%$	$V_{sw} \quad \eta=0\%$
$V_9 \quad \eta=100\%$	$V9' \quad \eta=100\%$
with each output $I_j=I_0/9$	with each output $I_j=I_0/5$

In the 1-9 Fan-Out Configuration, the voltages  $V_j$  are adjusted to yield diffraction efficiencies such that the outputs will have equal output intensities. In the 1-5 Fan-Out Configuration, four of the HOE outputs are set to yield zero diffraction efficiency, i.e., no output, and the remaining five voltages are adjusted to yield equal output intensities of the five active channels. It will be appreciated that a variety of configurations are possible, such as a 1-to-5 fan-out involving just the first five channels, or a 1-to-3 fan-out involving the first, sixth, and ninth channel. Moreover, it will be appreciated that the relative intensities of the outputs can be advantageously adjusted by adjusting the switching voltages. In addition, for any system including N channels, the outputs can be matched by adjusting the voltage of each HOE to  $V_j(N)$  to keep  $\eta_j=(N-j+1)^{-1}$  for each value of N.

It will be appreciated that such systems can include a plurality of inputs and that these inputs may be disposed on either side of the substrate. Similarly, such systems could advantageously include one or a plurality of outputs and that these outputs may be disposed on either side of the substrate. It will be further appreciated that a static input could be combined with switchable outputs and that static outputs could be substituted for one or all of the switchable outputs. Moreover, as noted above, the ability to switch the PDLC grating allows for selected control of the intensity and position of light coupled

into or out of the substrate and has more potential for use as reconfigurable optical interconnects.

It will be appreciated that prepolymer mixtures for the preparation of switchable slanted gratings have been described herein. In the preparation of switchable slanted gratings for use as optical coupling devices, it is desirable to select the prepolymer mixture so that the average refractive index of the resulting grating is similar to the refractive index of the substrate. In the preferred embodiment in which the grating is coupled to a glass substrate, it has been found that a combination of the following prepolymer components will yield a grating having a desirable average index of refraction: dipentaerythritol pentaacrylate, the chain extender N-vinyl pyrrolidinone (NVP), the liquid crystal E7, the photoinitiator rose bengal and a co-initiator N-phenyl glycine as described previously herein.

Highly slanted gratings in accordance with the invention can be prepared by disposing the prepolymer mixture between ITO coated glass slides using spacers of thickness 15-20  $\mu\text{m}$ . The gratings were recorded using the 488 nm line of an argon-ion laser. The geometry for writing the gratings is shown in FIG. 18. Reading of the gratings was carried out using a He-Ne(633nm) laser beam.

Electrical switching of the gratings can be accomplished by monitoring the change in the diffraction efficiency (DE) and transmission as the strength of the electric field is increased. The electric field was produced by applying an amplified 2 kHz square wave from a function generator to the ITO electrodes on the sample. Using square wave pulse, the time responses of the gratings for electrical switching were also measured. Both field on and off times were measured.

Low voltage, high resolution scanning electron microscopy (SEM) can be used to obtain film thickness and morphology. Samples for SEM can be prepared by removing the films from the glass slides and fracturing in liquid nitrogen. The liquid crystal in the

sample can be removed by soaking in methanol, and the films coated with 2-3 nm tungsten.

FIG. 27 shows the electrical switching curve for a switchable guided substrate-mode coupler. The curve is very similar to non-slanted grating curves with a critical switching field of about  $7.5\text{V}/\mu\text{m}$ . The best dynamic range measured was 17.8 dB in the transmitted beam and 20.6 dB in the diffracted beam. The switching times of the slanted gratings were also measured as shown in FIGS. 28 and 29. The measured on time was  $197\text{ }\mu\text{s}$  and the off time  $168\text{ }\mu\text{s}$  for an applied 95 V step voltage. Higher driving voltages appear to lead to the unusual response shown in FIG. 30 where the diffracted beam quickly reaches a minimum and then increases again to a constant. It is believed that this effect is due to the rotation of the LC symmetry axis far past the angle for best index matching, a situation which is difficult to obtain in a non-slanted grating but not in a highly slanted grating.

An experimental demonstration of the coupling of the diffracted light from the slanted grating on to a glass slab and the electrical switching is shown in Figures 7 and 8 of an article entitled "Electrically Switchable Holograms Containing Novel PDLC Structures," L.V. Natarajan, R.L. Sutherland, V.P. Tondiglia, T.J. Bunning, and R.M. Neal, Vol. 3143, Liquid Crystals, SPIE (1997), incorporated herein by reference. Similarly, an SEM image, which clearly shows the slanted nature of the grating, is shown in Figure 9 of this article. According to the SEM image, the grating spacing was found to be  $0.35\mu\text{m}$  and the slant angle of the grating calculated from the SEM image was found to be  $26^\circ$ , which was in agreement with the theoretical expectation. It is also seen from the SEM image that the grating consists of periodic planes of phase separated liquid crystals and polymer.

In another embodiment of the present invention, PDLC materials can be made that exhibit a property known as form birefringence whereby polarized light that is transmitted through the grating will have its polarization modified. Such gratings are known as

subwavelength gratings, and they behave like a negative uniaxial crystal, such as calcite, potassium dihydrogen phosphate, or lithium niobate, with an optic axis perpendicular to the PDLC planes. Referring now to FIG. 13, there is shown an elevational view of a transmission grating **200** in accordance with the present invention having periodic planes of polymer planes **200a** and PDLC planes **200b** disposed perpendicular to the front surface **204** of the grating **200**. The optic axis **206** is disposed perpendicular to polymer planes **200a** and the PDLC planes **200b**. Each polymer plane **200a** has a thickness  $t_p$ , and refractive index  $n_p$ , and each PDLC plane **200b** has a thickness  $t_{PDL}$  and refractive index  $N_{PDL}$ .

10

Where the combined thickness of the PDLC plane and the polymer plane is substantially less than an optical wavelength (i.e.  $(t_{PDL} + t_p) \ll \lambda$ ), the grating will exhibit form birefringence. As discussed below, the magnitude of the shift in polarization is proportional to the length of the grating. Thus, by carefully selecting the length,  $L$ , of the subwavelength grating for a given wavelength of light, one can rotate the plane of polarization or create circularly polarized light. Consequently, such subwavelength gratings can be designed to act as a half-wave or quarter-wave plate, respectively. Thus, an advantage of this process is that the birefringence of the material may be controlled by simple design parameters and optimized to a particular wavelength, rather than relying on the given birefringence of any material at that wavelength.

20

To form a half-wave plate, the retardance of the subwavelength grating must be equal to one-half of a wavelength, i.e., retardance =  $\lambda/2$ , and to form a quarter-wave plate, the retardance must be equal to one-quarter of a wavelength, i.e., retardance =  $\lambda/4$ .

It is known that the retardance is related to the net birefringence,  $|\Delta n|$ , which is the difference between the ordinary index of refraction,  $n_o$ , and the extraordinary index of refraction  $n_e$ , of the sub-wavelength grating by the following relation:

$$\text{Retardance} = |\Delta n|L = |n_e - n_o|L$$

Thus, for a half-wave plate, i.e., a retardance equal to one-half of a wavelength, the length of the subwavelength grating should be selected so that:

5 
$$L = \lambda/(2|\Delta n|)$$

Similarly, for a quarter-wave plate, i.e., a retardance equal to one-quarter of a wavelength, the length of the subwavelength grating should be selected so that:

10 
$$L = \lambda/(4|\Delta n|)$$

566220 " 69E9E60  
If, for example, the polarization of the incident light is at an angle of 45° with respect to the optic axis **210** of a half-wave plate **212**, as shown in FIG. 14a, the plane polarization will be preserved, but the polarization of the wave exiting the plate will be shifted by 90°. Thus, referring now to FIG. 14b and 14c, where the half-wave plate **212** is placed between cross polarizers **214** and **216**, the incident light will be transmitted. If an appropriate switching voltage is applied, as shown in FIG. 14d, the polarization of the light is not rotated and the light will be blocked by the second polarizer.

20 For a quarter-wave plate plane polarized light is converted to circularly polarized light. Thus, referring now to FIG. 15a, where quarter wave plate **217** is placed between a polarizing beam splitter **218** and a mirror **219**, the reflected light will be reflected by the beam splitter **218**. If an appropriate switching voltage is applied, as shown in FIG. 15b, the reflected light will pass through the beam splitter and be retroreflected on the incident  
25 beam.

Referring now to FIG. 16a, there is shown an elevational view of a subwavelength grating **230** recorded in accordance with the above-described methods and having periodic planes of polymer channels **230a** and PDLC channels **230b** disposed perpendicular to the front surface **234** of grating **230**. As shown FIG. 16a, the symmetry  
30



axis **232** of the liquid crystal domains is disposed in a direction parallel to the front surface **234** of the grating and perpendicular to the periodic channels **230a** and **b** of the grating **230**. Thus, when an electric field **E** is applied across the grating, as shown in FIG. 15b, the symmetry axis **232** distorts and reorients in a direction along the field **E**, which is perpendicular to the front surface **234** of the grating and parallel to the periodic channels **230a** and **230b** of the grating **230**. As a result, subwavelength grating **230** can be switched between a state where it changes the polarization of the incident radiation and a state in which it does not. Without wishing to be bound by any theory, it is currently believed that the direction of the liquid crystal domain symmetry **232** is due to a surface tension gradient which occurs as a result of the anisotropic diffusion of monomer and liquid crystal during recording of the grating and that this gradient causes the liquid crystal domain symmetry to orient in a direction perpendicular to the periodic planes.

As discussed in Born and Wolf, Principles of Optics, 5th Ed., New York (1975) and incorporated herein by reference, the birefringence of a subwavelength grating is given by the following relation:

$$n_e^2 - n_o^2 = \frac{-(f_{\text{PDLC}})(f_p)(n_{\text{PDLC}}^2 - n_p^2)}{[f_{\text{PDLC}}n_{\text{PDLC}}^2 + f_p n_p^2]}$$

where

$n_o$  = the ordinary index of refraction of the subwavelength grating;  
 $n_e$  = the extraordinary index of refraction;  
 $n_{\text{PDLC}}$  = the refractive index of the PDLC plane;  
 $n_p$  = the refractive index of the polymer plane;  
 $n_{\text{LC}}$  = the effective refractive index of the liquid crystal seen by an incident optical wave;

$$f_{\text{PDLC}} = t_{\text{PDLC}} / (t_{\text{PDLC}} + t_p)$$

$$f_p = t_p / (t_{\text{PDLC}} + t_p)$$

Thus, the net birefringence of the subwavelength grating will be zero if  $n_{\text{PDLC}} = n_p$ .

It is known that the effective refractive index of the liquid crystal,  $n_{LC}$ , is a function of the applied electric field, having a maximum when the field is zero and a value equal to that of the polymer,  $n_p$ , at some value of the electric field,  $E_{MAX}$ . Thus, by application of an electric field, the refractive index of the liquid crystal,  $n_{LC}$ , and, hence, the refractive index of the PDLC plane can be altered. Using the relationship set forth above, the net birefringence of a subwavelength grating will be a minimum when  $n_{PDLC}$  is equal to  $n_p$ , i.e., when  $n_{LC} = n_p$ . Therefore, if the refractive index of the PDLC plane can be matched to the refractive index of the polymer plane, i.e.,  $n_{PDLC} = n_p$ , by the application of an electric field, the birefringence of the subwavelength grating can be switched off.

The following equation for net birefringence, i.e.,  $|\Delta n| = |n_e - n_o|$ , follows from the equation given in Born and Wolf (reproduced above):

$$\Delta n = - \frac{[f_{PDLC} (f_p) (n_{PDLC}^2 - n_p^2)]}{[2n_{AVG} (f_{PDLC} n_{PDLC}^2 + f_p n_p^2)]}$$

$$\text{where } n_{AVG} = (n_e + n_o) / 2$$

Furthermore, it is known that the refractive index of the PDLC plane  $n_{PDLC}$  is related to the effective refractive index of the liquid crystal seen by an incident optical wave,  $n_{LC}$ , and the refractive index of the surrounding polymer plane,  $n_p$ , by the following relation:

$$n_{PDLC} = n_p + f_{LC}[n_{LC} - n_p]$$

where  $f_{LC}$  is the volume fraction of liquid crystal dispersed in the polymer within the PDLC plane,  $f_{LC} = [V_{LC} / (V_{LC} + V_P)]$ .

By way of example, a typical value for the effective refractive index for the liquid crystal in the absence of an electric field is  $n_{LC} = 1.7$ , and for the polymer layer  $n_p = 1.5$ . For a grating where the thickness of the PDLC planes and the polymer planes are equal (i.e.,  $t_{PDL} = t_p$ ,  $f_{PDL} = 0.5 = f_p$ ) and  $f_{LC} = 0.35$ , the net birefringence,  $\Delta n$ , of the subwavelength grating is approximately 0.008. Thus, where the incident light has a wavelength of  $0.8\mu m$ , the length of the subwavelength grating should be  $50\mu m$  for a half-wave plate and  $25\mu m$  for a quarter-wave plate. Furthermore, by application of an electric field of approximately  $5 V/\mu m$ , the refractive index of the liquid crystal can be matched to the refractive index of the polymer and the birefringence of the subwavelength grating turned off. Thus, the switching voltage,  $V_n$ , for a halfwave plate is on the order of 250 volts, and for a quarterwave plate approximately 125 volts.

By applying such voltages, the plates can be switched between the on and off (zero retardance) states on the order of microseconds. As a means of comparison, current Pockels cell technology can be switched in nanoseconds with voltages of approximately 1000-2000 volts, and bulk nematic liquid crystals can be switched on the order of milliseconds with voltages of approximately 5 volts.

In an alternative embodiment of the invention shown in FIG. 17, the switching voltage of the subwavelength grating can be reduced by stacking several subwavelength gratings **220a-e** together, and connecting them electrically in parallel. By way of example, it has been found that a stack of five gratings each with a length of  $10\mu m$  yields the thickness required for a half-wave plate. It should be noted that the length of the sample is somewhat greater than  $50\mu m$ , because each grating includes an indium-tin-oxide coating which acts as a transparent electrode. The switching voltage for such a stack of plates, however, is only 50 volts.

Subwavelength gratings in accordance with the present invention are expected to find suitable application in the areas of polarization optics and optical switches for displays and laser optics, as well as tunable filters for telecommunications, colorimetry, spectroscopy, laser protection, and the like. Similarly, electrically switchable transmission gratings have many applications for which beams of light must be deflected or holographic images switched. Among these applications are: fiber optic switches, reprogrammable NxN optical interconnects for optical computing, beam steering for laser surgery, beam steering for laser radar, holographic image storage and retrieval, digital zoom optics (switchable holographic lenses), graphic arts and entertainment, and the like.

10

A switchable hologram is one for which the diffraction efficiency of the hologram may be modulated by the application of an electric field, and can be switched from a fully on state (high diffraction efficiency) to a fully off state (low or zero diffraction efficiency). A static hologram is one whose properties remain fixed independent of an applied field. In accordance with the present invention, a high contrast static hologram can also be created. In this variation of the present invention, the holograms are recorded as described previously. The cured polymer film is then soaked in a suitable solvent at room temperature for a short duration and finally dried. For the liquid crystal E7, methanol has shown satisfactory application. Other potential solvents include alcohols such as ethanol, hydrocarbons such as hexane and heptane, and the like. When the material is dried, a high contrast static hologram with high diffraction efficiency results. The high diffraction efficiency is a consequence of the large index modulation in the film ( $\Delta n \sim 0.5$ ) because the second phase domains are replaced with empty (air) voids ( $n \sim 1$ ).

Similarly, in accordance with the present invention, a high birefringence static sub-wavelength wave-plate can also be formed. Due to the fact that the refractive index for air is significantly lower than for most liquid crystals, the corresponding thickness of the half-wave plate would be reduced accordingly. Synthesized waveplates in accordance with the present invention can be used in many applications employing polarization

optics, particularly where a material of the appropriate birefringence at the appropriate wavelength is unavailable, too costly, or too bulky.

5 In the claims, the term polymer-dispersed liquid crystals and polymer-dispersed liquid crystal material includes, as may be appropriate, solutions in which none of the monomers have yet polymerized or cured, solutions in which some polymerization has occurred, and solutions which have undergone complete polymerization. Those of skill in the art in the field of the invention will clearly understand that the use herein of the standard term used in the art, polymer-dispersed liquid crystals (which grammatically  
10 refers to liquid crystals dispersed in a fully polymerized matrix) is meant to include all or part of a more grammatically correct prepolymer-dispersed liquid crystal material or a more grammatically correct starting material for a polymer-dispersed liquid crystal material.

15 It will be seen that modifications to the invention as described may be made, as might occur to one with skill in the field of the invention, within the intended scope of the claims. Therefore, all embodiments contemplated have not been shown in complete detail. Other embodiments may be developed without departing from the spirit of the invention or from the scope of the claims.

WHAT IS CLAIMED IS:

1. A switchable slanted transmission grating comprising a polymer-dispersed liquid crystal material disposed between at least two optically transparent electrode plates, wherein the polymer-dispersed liquid crystal material is constructed by exposing to light in an interference pattern a mixture comprising, before exposure:
- (a) a polymerizable monomer comprising at least one acrylate;
  - (b) at least one liquid crystal;
  - (c) a chain-extending monomer;
  - (d) a coinitiator; and
  - (e) a photoinitiator.
2. The switchable slanted transmission grating according to Claim 1, wherein the polymerizable monomer comprises a mixture of di-, tri-, tetra-, and pentaacrylates.
3. The switchable slanted transmission grating according to Claim 2, wherein the polymerizable monomer is at least one acrylate selected from the group consisting of triethyleneglycol diacrylate, trimethylolpropane triacrylate, pentaerythritol triacrylate, pentaerythritol tetracrylate, and dipentaerythritol pentaacrylate.
4. The switchable slanted transmission grating according to Claim 3, wherein the polymerizable monomer comprises a mixture of tri- and pentaacrylates.

5. The switchable slanted transmission grating according to Claim 4, wherein the polymerizable monomer comprises dipentaerythritol pentaacrylate.

6. The switchable slanted transmission grating according to Claim 1, wherein the at least one liquid crystal is at least one liquid crystal selected from the group consisting of a mixture of cyanobiphenyls, 4'-n-pentyl-4-cyanobiphenyl, 4'-n-heptyl-4-cyanobiphenyl, 4'-octaoxy-4-cyanobiphenyl, 4'-pentyl-4-cyanoterphenyl, and  $\alpha$ -methoxybenzylidene-4'-butylaniline.

7. The switchable slanted transmission grating according to Claim 6, wherein the at least one liquid crystal comprises a mixture of cyanobiphenyls.

8. The switchable slanted transmission grating according to Claim 1, wherein the chain-extending monomer is at least one member selected from the group consisting of N-vinyl pyrrolidone, N-vinyl pyridine, acrylonitrile, and N-vinyl carbazole.

9. The switchable slanted transmission grating according to Claim 8, wherein the chain-extending monomer is N-vinyl pyrrolidone.

10. The switchable slanted transmission grating according to Claim 1, wherein the coinitiator is at least one member selected from the group consisting of N-

phenylglycine, triethylene amine, triethanolamine, and N, N-dimethyl-2,6-diisopropyl aniline.

11. The switchable slanted transmission grating according to Claim 10,  
5 wherein the coinitiator is N-phenylglycine.

12. The switchable slanted transmission grating according to Claim 1, wherein  
the photoinitiator is at least one member selected from the group consisting of rose bengal  
ester, rose bengal sodium salt, eosin, eosin sodium salt, 4,5-diiodosuccinyl fluorescein,  
10 camphorquinone, methylene blue, cationic cyanine dyes with trialkylborate anions, and  
merocyanine dyes derived from spiropyran.

13. The switchable slanted transmission grating according to Claim 12,  
wherein the photoinitiator is rose bengal sodium salt.  
15

14. The switchable slanted transmission grating according to Claim 1, wherein  
the polymer-dispersed liquid crystal material, before exposure, further comprises a  
surfactant.

15. The switchable slanted transmission grating according to Claim 14,  
20 wherein the surfactant is octanol.



16. The switchable slanted transmission grating according to Claim 1, wherein the polymerizable monomer comprises dipentaerythritol pentaacrylate, the at least one liquid crystal comprises a mixture of cyanobiphenyls, the chain-extending monomer is N-vinyl pyrrolidone, the coinitiator is N-phenylglycine, and the photoinitiator is rose bengal sodium salt.

17. An optical coupling device comprising:  
at least one switchable slanted transmission grating according to Claim 1; and  
at least one voltage source associated with said switchable slanted transmission grating.

18. The optical coupling device according to Claim 17, wherein the optical coupling device further comprises at least one transparent substrate.

19. The optical coupling device according to Claim 18, wherein the at least one switchable slanted transmission grating is coupled to the at least one transparent substrate.

20. The optical coupling device according to Claim 19, wherein the at least one transparent substrate is glass.

21. The optical coupling device according to Claim 20, wherein the polymerizable monomer comprises dipentaerythritol pentaacrylate.

22. The optical coupling device according to Claim 17, wherein the optical coupling device is a selectively adjustable and reconfigurable one-to-many fan-out optical coupling device.

23. The optical coupling device according to Claim 22, wherein the at least one liquid crystal comprises a mixture of cyanobiphenyls.

24. The optical coupling device according to Claim 18, wherein the average index of refraction of the at least one switchable slanted transmission grating is similar to the refractive index of the at least one transparent substrate.

25. The optical coupling device according to Claim 24, wherein the chain-extending monomer is N-vinyl pyrrolidone.

26. The optical coupling device according to Claim 17, wherein the optical coupling device further comprises at least one transparent electrode.

27. The optical coupling device according to Claim 26, wherein the coinitiator is N-phenylglycine.

28. The optical coupling device according to Claim 18, wherein the at least one switchable slanted transmission grating has a slant angle,  $\theta_s$ , and the at least one transparent substrate has a critical angle,  $\theta_c$ , for total internal reflection and wherein  
5  $2\theta_s > \theta_c$ .

29. The optical coupling device according to Claim 28, wherein the photoinitiator is rose bengal sodium salt.

10 30. The optical coupling device according to Claim 17, wherein the polymer-dispersed liquid crystal material, before exposure, further comprises a surfactant.

31. The optical coupling device according to Claim 30, wherein the surfactant is octanol.

15

32. The optical coupling device according to Claim 17, wherein an anti-reflective coating is applied to the at least one switchable slanted transmission grating.

20 33. The optical coupling device according to Claim 17, wherein the polymerizable monomer comprises dipentaerythritol pentaacrylate, the at least one liquid crystal comprises a mixture of cyanobiphenyls, the chain-extending monomer is N-vinyl

pyrrolidone, the coinitiator is N-phenylglycine, and the photoinitiator is rose bengal sodium salt.

34. A method for preparing a switchable slanted transmission grating,  
5 comprising:

disposing between at least two optically transparent electrode plates, a mixture that comprises, before exposure:

- (a) a polymerizable monomer comprising at least one acrylate;
- (b) a liquid crystal;
- 10 (c) a chain-extending monomer;
- (d) a coinitiator; and
- (e) a photoinitiator;

and

15 exposing this mixture to light in an interference pattern.

35. The method for preparing a switchable slanted transmission grating according to Claim 34, wherein the polymerizable monomer comprises a mixture of di-, tri-, tetra-, and pentaacrylates.

20 36. The method for preparing a switchable slanted transmission grating according to Claim 35, wherein the polymerizable monomer is at least one acrylate selected from the group consisting of triethyleneglycol diacrylate, trimethylolpropane

665220 69E9E60  
triacrylate, pentaerythritol triacrylate, pentaerythritol tetracrylate, and dipentaerythritol pentaacrylate.

37. The method for preparing a switchable slanted transmission grating  
5 according to Claim 36, wherein the polymerizable monomer comprises a mixture of tri-  
and pentaacrylates.

38. The method for preparing a switchable slanted transmission grating  
according to Claim 37, wherein the polymerizable monomer comprises dipentaerythritol  
10 pentaacrylate.

39. The method for preparing a switchable slanted transmission grating  
according to Claim 34, wherein the at least one liquid crystal is at least one liquid crystal  
selected from the group consisting of a mixture of cyanobiphenyls, 4'-n-pentyl-4-  
15 cyanobiphenyl, 4'-n-heptyl-4-cyanobiphenyl, 4'-octaoxy-4-cyanobiphenyl, 4'-pentyl-4-  
cyanoterphenyl, and  $\alpha$ -methoxybenzylidene-4'-butylaniline.

40. The method for preparing a switchable slanted transmission grating  
according to Claim 39, wherein the at least one liquid crystal comprises a mixture of  
20 cyanobiphenyls.

41. The method for preparing a switchable slanted transmission grating according to Claim 34, wherein the chain-extending monomer is at least one member selected from the group consisting of N-vinyl pyrrolidone; N-vinyl pyridine, acrylonitrile, and N-vinyl carbazole.

5

42. The method for preparing a switchable slanted transmission grating according to Claim 41, wherein the chain-extending monomer is N-vinyl pyrrolidone.

43. The method for preparing a switchable slanted transmission grating according to Claim 34, wherein the coinitiator is at least one member selected from the group consisting of N-phenylglycine, triethylene amine, triethanolamine, and N, N-dimethyl-2,6-diisopropyl aniline.

44. The method for preparing a switchable slanted transmission grating according to Claim 43, wherein the coinitiator is N-phenylglycine.

45. The method for preparing a switchable slanted transmission grating according to Claim 34, wherein the photoinitiator is at least one member selected from the group consisting of rose bengal ester, rose bengal sodium salt, eosin, eosin sodium salt, 4,5-diiodosuccinyl fluorescein, camphorquinone, methylene blue, cationic cyanine dyes with trialkylborate anions, and merocyanine dyes derived from spiropyran.

46. The method for preparing a switchable slanted transmission grating according to Claim 45, wherein the photoinitiator is rose bengal sodium salt.

47. The method for preparing a switchable slanted transmission grating according to Claim 34, wherein the polymer-dispersed liquid crystal material, before exposure, further comprises a surfactant.

48. The method for preparing a switchable slanted transmission grating according to Claim 47, wherein the surfactant is octanol.

49. The method for preparing a switchable slanted transmission grating according to Claim 34, wherein the light in an interference pattern is obtained from at least two beams of coherent light.

50. The method for preparing a switchable slanted transmission grating according to Claim 49, wherein one beam of coherent light arrives at the mixture with a large angle of incidence with respect to the second beam.

51. The method for preparing a switchable slanted transmission grating according to Claim 34, wherein the polymerizable monomer comprises dipentaerythritol pentaacrylate, the at least one liquid crystal comprises a mixture of cyanobiphenyls, the

chain-extending monomer is N-vinyl pyrrolidone, the coinitiator is N-phenylglycine, and the photoinitiator is rose bengal sodium salt.

52. A method for preparing an optical coupling device comprising  
5 constructing a switchable slanted transmission grating according to Claim 34, and  
electrically connecting said optically transparent electrodes to a voltage source.

53. The method for preparing an optical coupling device according to Claim  
52, wherein the optical coupling device further comprises at least one transparent  
10 substrate.

54. The method for preparing an optical coupling device according to Claim  
53, wherein the at least one switchable slanted transmission grating is coupled to the at  
least one transparent substrate.

55. The method for preparing an optical coupling device according to Claim  
54, wherein the at least one transparent substrate is glass.

56. The method for preparing an optical coupling device according to Claim  
20 55, wherein the polymerizable monomer comprises dipentaerythritol pentaacrylate.



57. The method for preparing an optical coupling device according to Claim 52, wherein the optical coupling device is a selectively adjustable and reconfigurable one-to-many fan-out optical coupling device.

5 58. The method for preparing an optical coupling device according to Claim 57, wherein the at least one liquid crystal comprises a mixture of cyanobiphenyls.

59. The method for preparing an optical coupling device according to Claim 52, wherein the average index of refraction of the at least one switchable slanted  
10 transmission grating is similar to the refractive index of the at least one transparent substrate.

60. The method for preparing an optical coupling device according to Claim 59, wherein the chain-extending monomer is N-vinyl pyrrolidone.

15 61. The method for preparing an optical coupling device according to Claim 52, wherein the optical coupling device further comprises at least one transparent electrode.

20 62. The method for preparing an optical coupling device according to Claim 61, wherein the coinitiator is N-phenylglycine.

63. The method for preparing an optical coupling device according to Claim 53, wherein the at least one switchable slanted transmission grating has a slant angle,  $\theta_s$ , and the at least one transparent substrate has a critical angle,  $\theta_c$ , for total internal reflection and wherein  $2\theta_s > \theta_c$ .

5

64. The method for preparing an optical coupling device according to Claim 63, wherein the photoinitiator is rose bengal sodium salt.

65. The method for preparing an optical coupling device according to Claim 52, wherein the polymer-dispersed liquid crystal material, before exposure, further comprises a surfactant.

66. The method for preparing an optical coupling device according to Claim 65, wherein the surfactant is octanol.

15

67. The method for preparing an optical coupling device according to Claim 52, wherein an anti-reflective coating is applied to the at least one switchable slanted transmission grating.

68. The method for preparing an optical coupling device according to Claim 52, wherein the polymerizable monomer comprises dipentaerythritol pentaacrylate, the at least one liquid crystal comprises a mixture of cyanobiphenyls, the chain-extending


monomer is N-vinyl pyrrolidone, the coinitiator is N-phenylglycine, and the photoinitiator is rose bengal sodium salt.

69. A selectively adjustable and reconfigurable one-to-many fan-out optical  
5 interconnect, comprising an input optical coupling device and one or more output optical  
coupling devices in optical contact with a substrate capable of transmitting light  
therebetween, wherein at least one of said optical coupling devices are according to  
Claim 17.

10 70. A holographic optical element comprising at least one optical coupling  
device according to Claim 17 in optical contact with a substrate capable of transmitting  
light.

## ABSTRACT

5 A new photopolymerizable material allows single-step, fast recording of volume  
holograms with properties that can be electrically controlled. Polymer-dispersed liquid  
crystals (PDLCs) in accordance with the invention preferably comprise a homogeneous  
mixture of a nematic liquid crystal and a multifunctional pentaacrylate monomer in  
combination with photoinitiator, coinitiator and cross-linking agent. Optionally, a  
surfactant such as octanoic acid may also be added. The PDLC material is exposed to  
10 coherent light to produce an interference pattern inside the material. Photopolymerization  
of the new PDLC material produces a hologram of clearly separated liquid crystal  
domains and cured polymer domains. Volume transmission gratings made with the new  
PDLC material can be electrically switched between nearly 100% diffraction efficiency  
and nearly 0% diffraction efficiency. By increasing the frequency of the switching  
15 voltage, switching voltages in the range of 50 Vrms can be achieved. The optional use of  
a surfactant allows low switching voltages at lower frequencies than without a surfactant.  
In an alternative embodiment, a PDLC material in accordance with the invention can be  
utilized to form reflection gratings, including switchable reflection gratings. In still  
further embodiments, a PDLC material in accordance with the invention can be used to  
20 form switchable subwavelength gratings. By further processing, static transmission,  
reflection, and subwavelength PDLC materials can be formed. In addition, PDLC  
materials in accordance with the present invention can be used to form switchable slanted  
transmission gratings suitable for switchable optical coupling and reconfigurable optical  
interconnects.

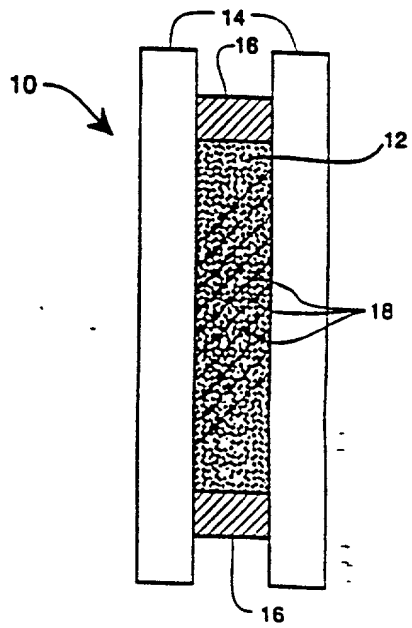

**FIG. 1**

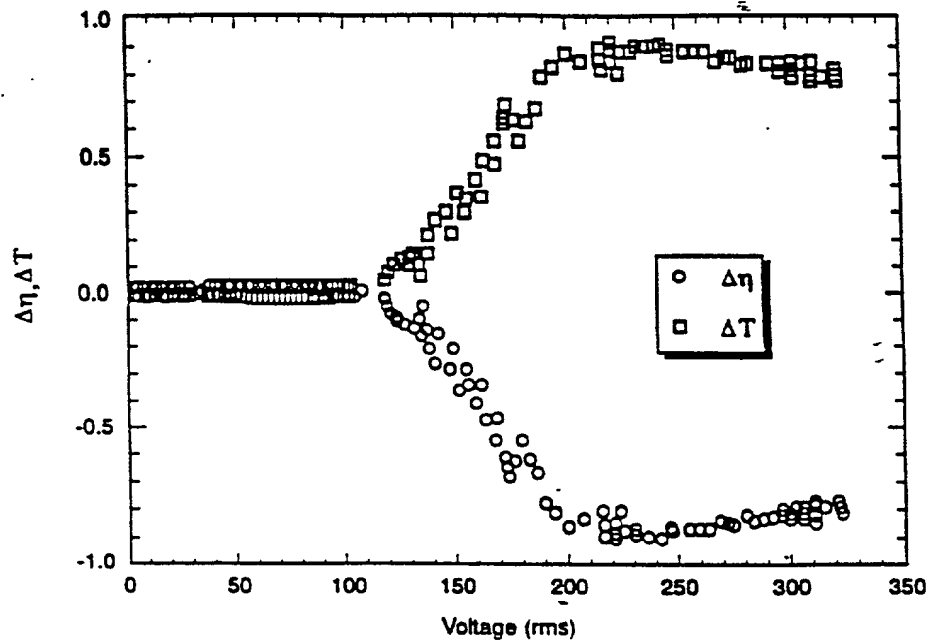


FIG. 2

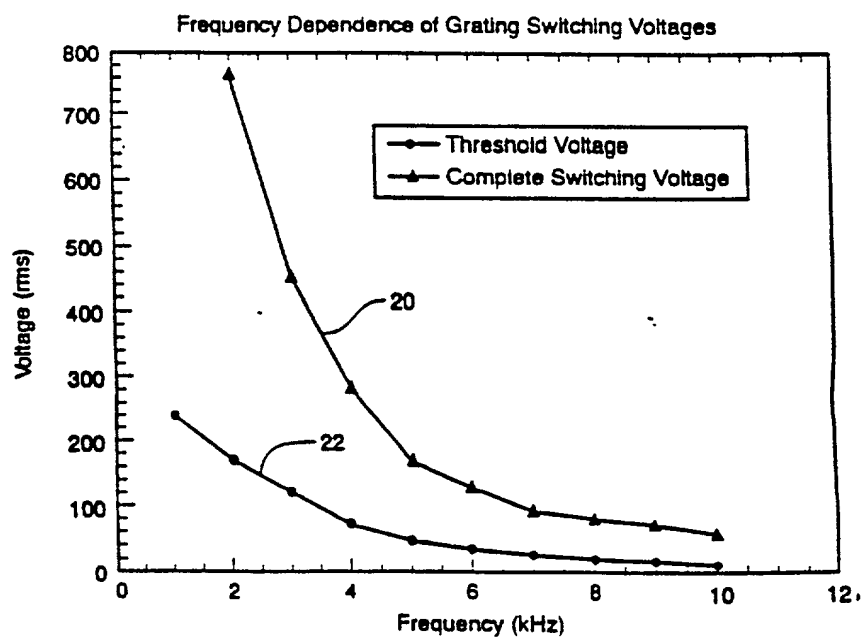


FIG. 3


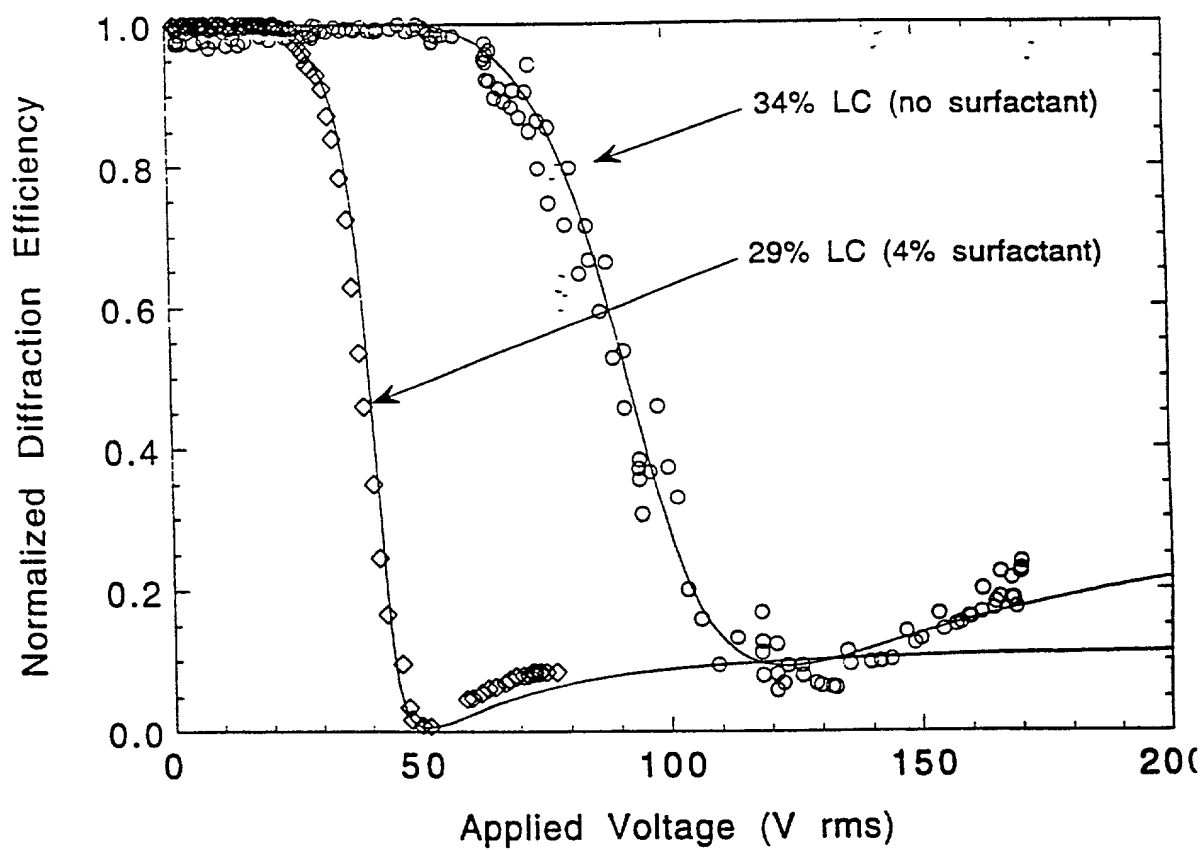


FIG. 4

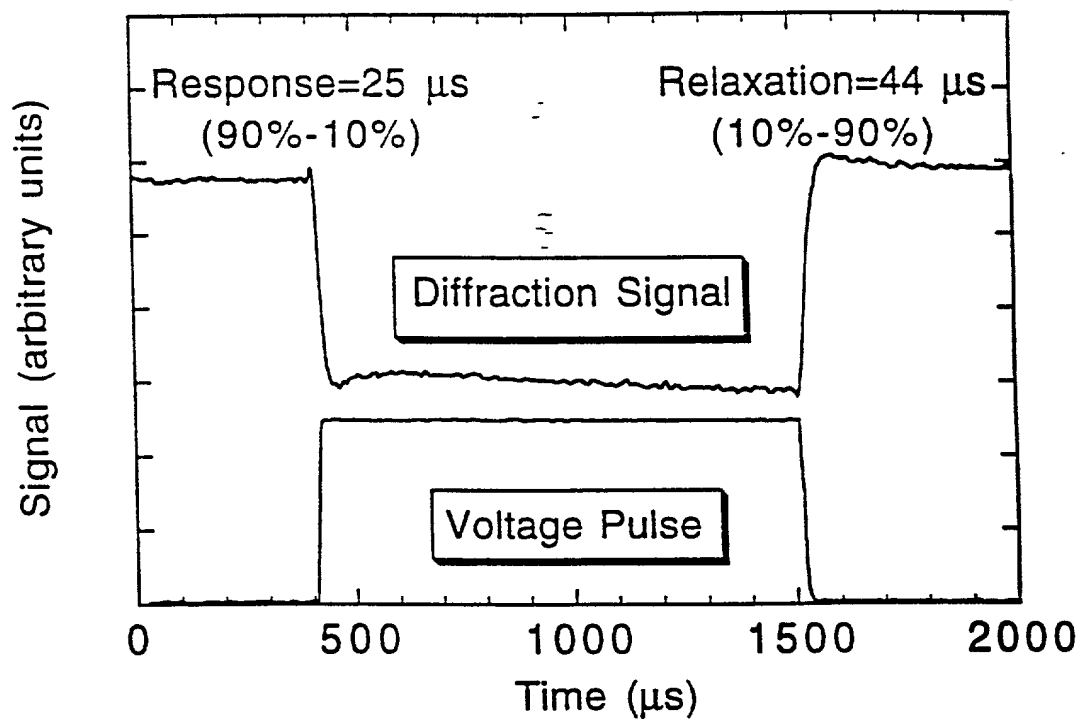

**FIG. 5**



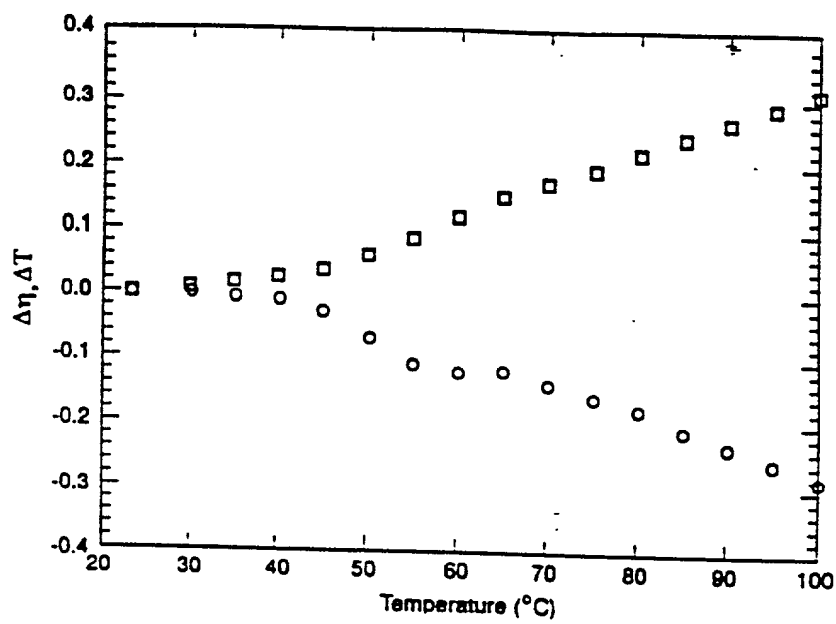


FIG. 6

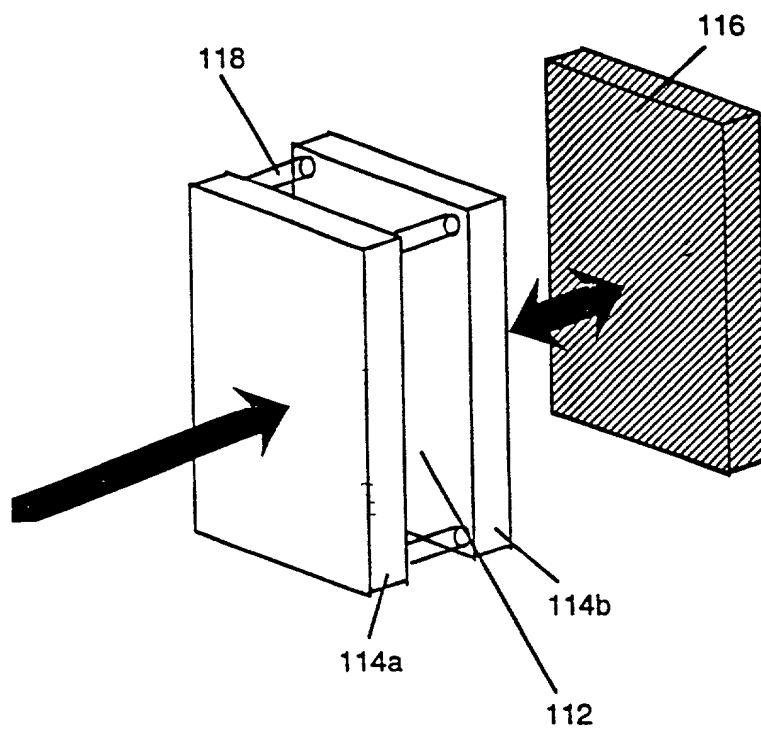


FIG. 7

65220" 69EE69

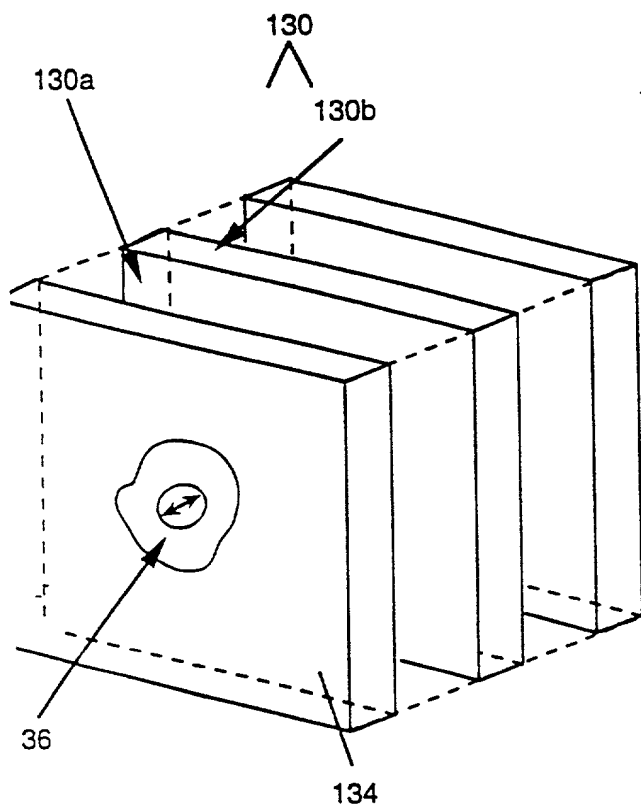


FIG. 8a

Reflection Grating

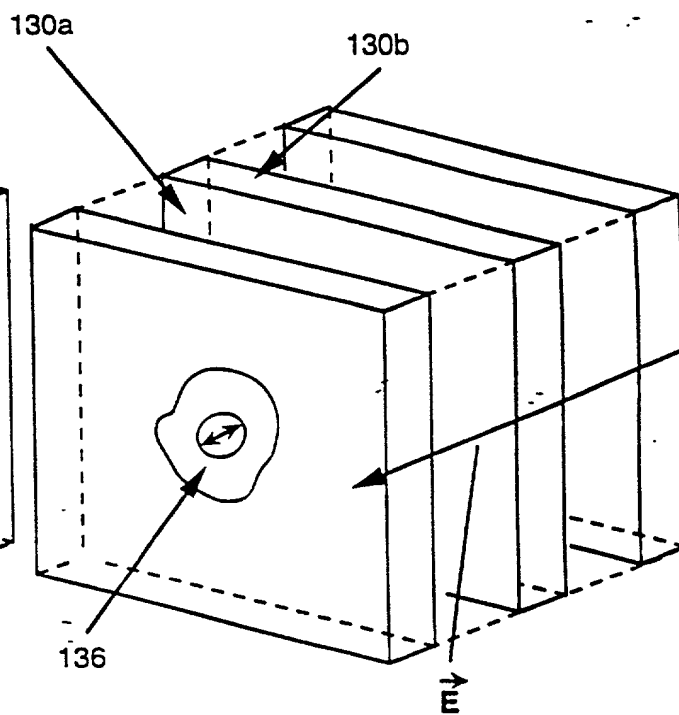


FIG. 8b

656220" 69FE9660

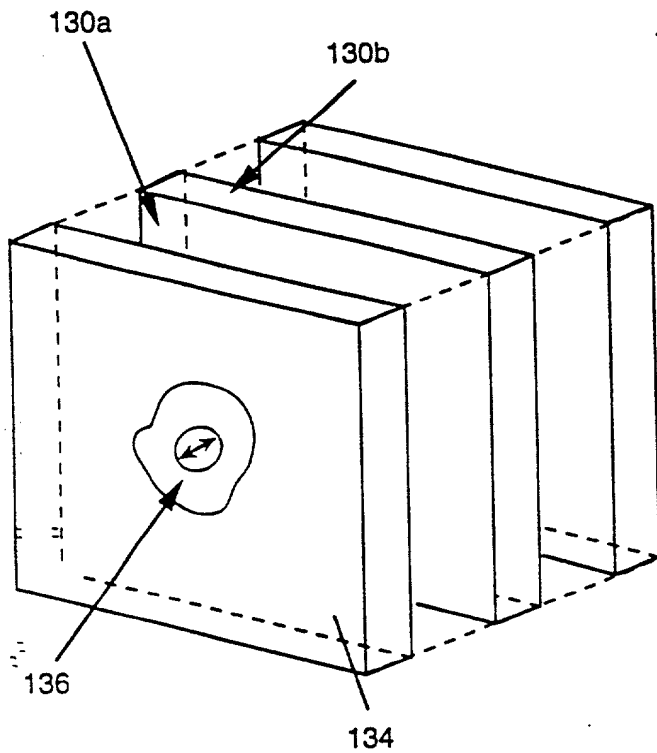


FIG. 9a

Reflection Grating

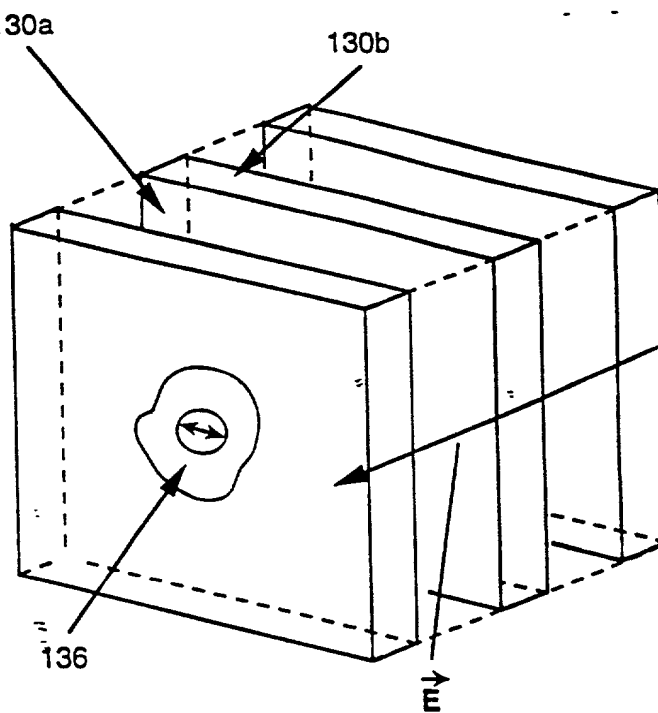


FIG. 9b

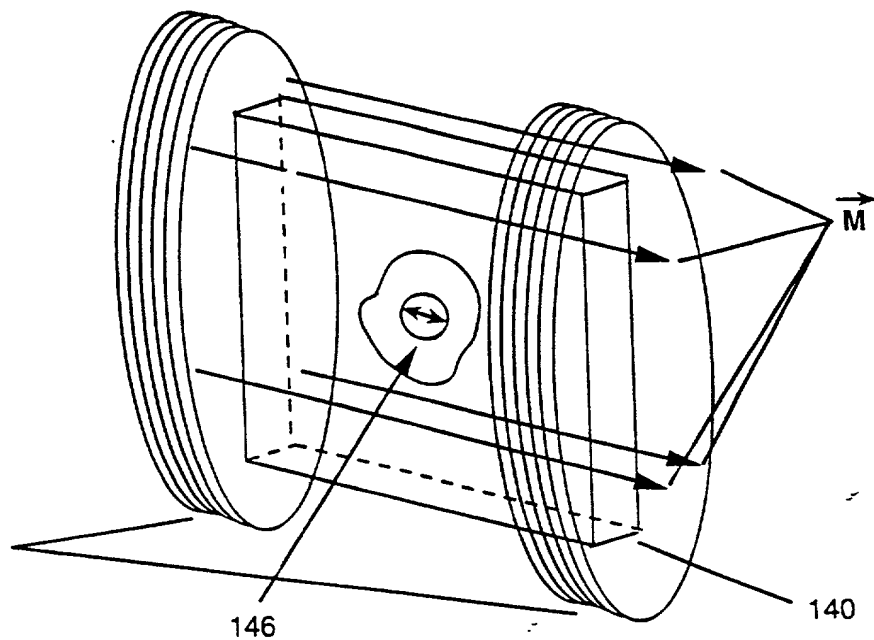


FIG. 10a

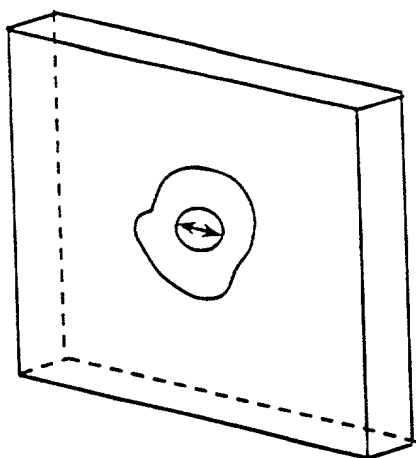


FIG. 10b


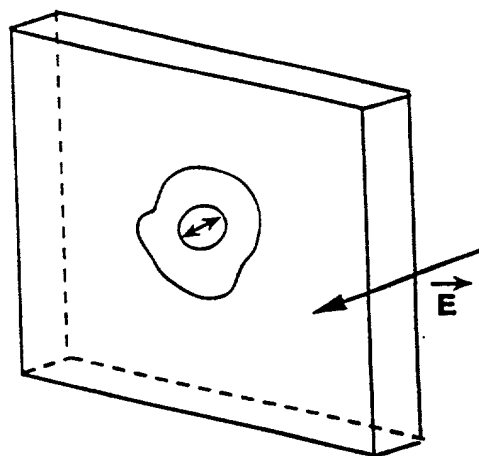



FIG. 10c



transmission

FIG. 11a

Slanted



reflection

FIG. 11b

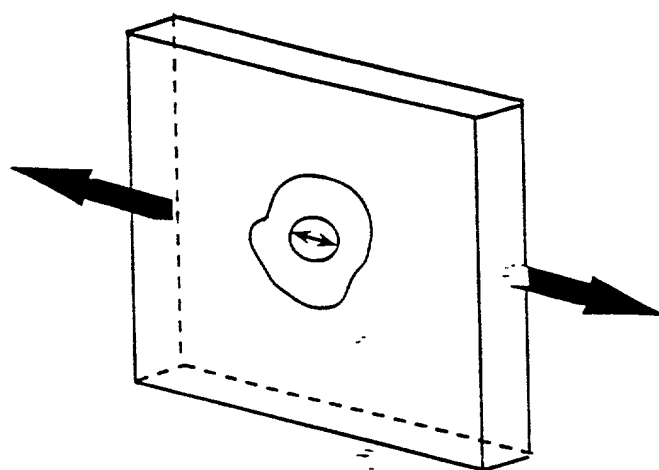


FIG. 12

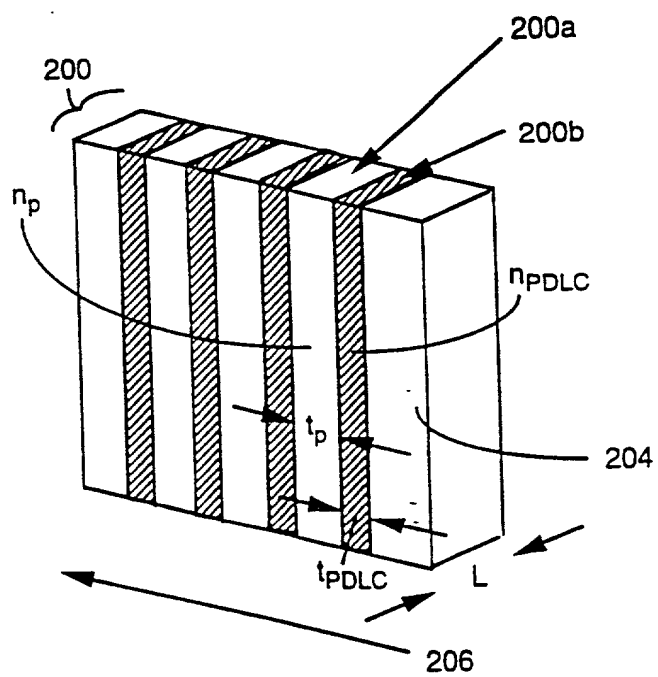


FIG. 13



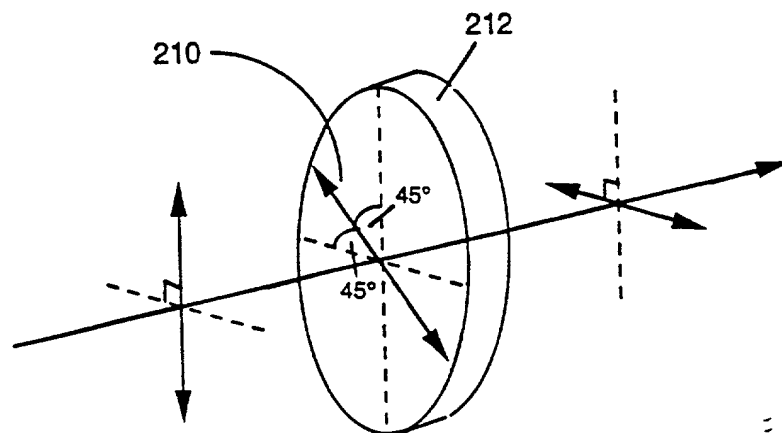


FIG. 14a

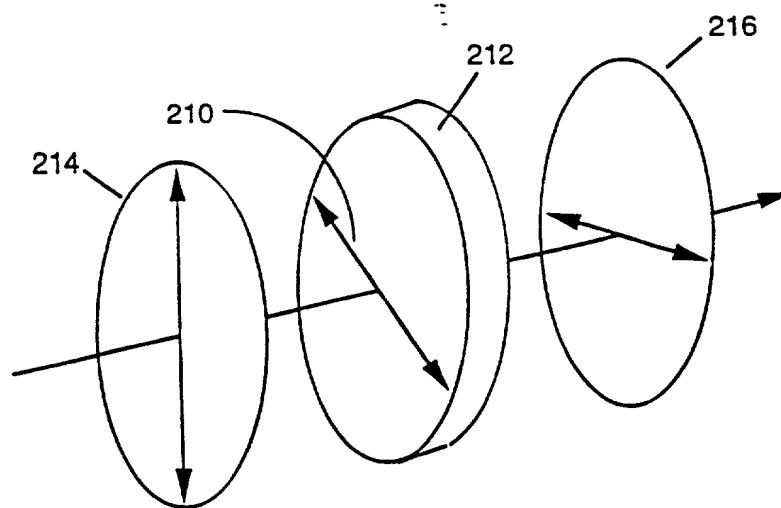


FIG. 14b

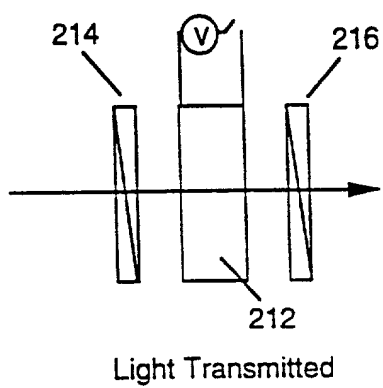


FIG. 14c

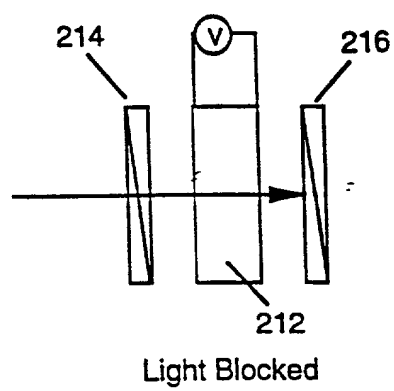


FIG. 14d

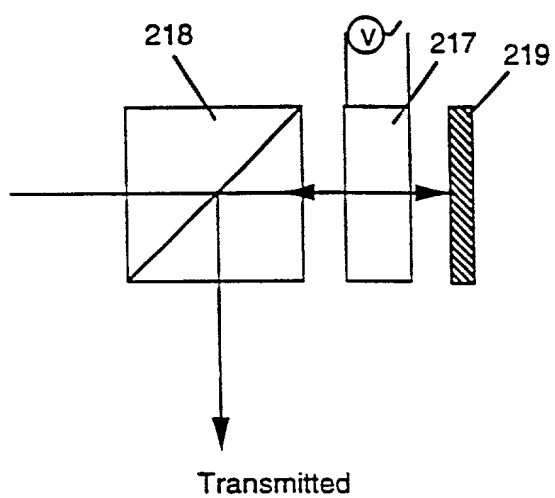


FIG. 15a



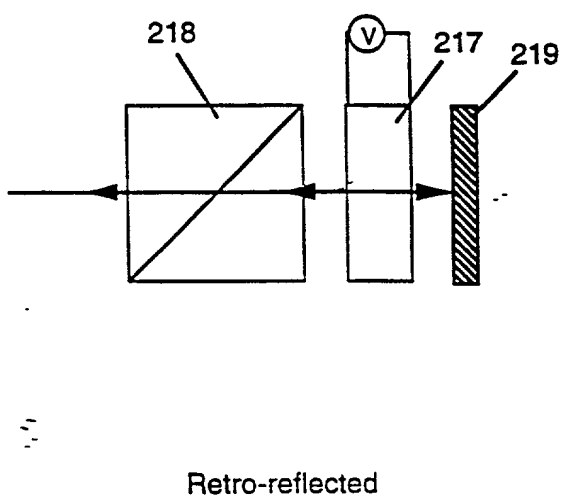


FIG. 15b

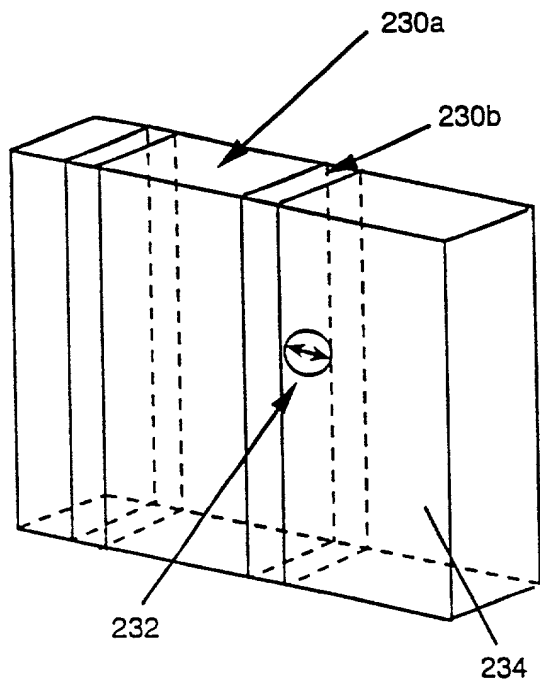

Unswitched State

FIG. 16a

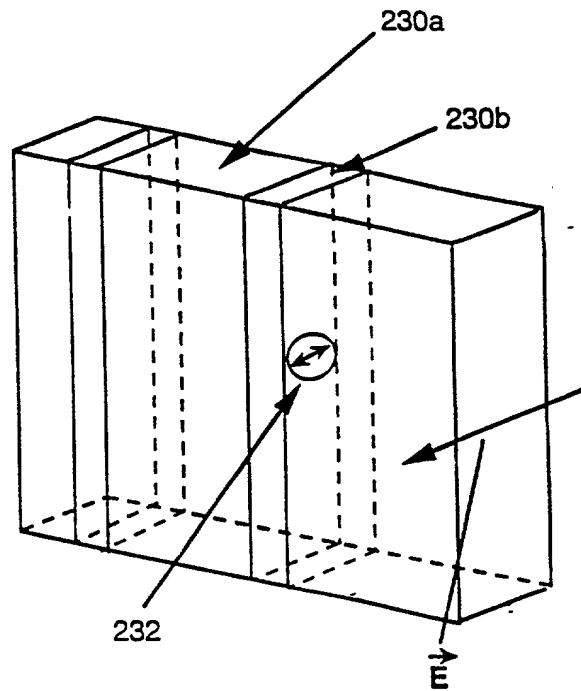

Switched State

FIG. 16b

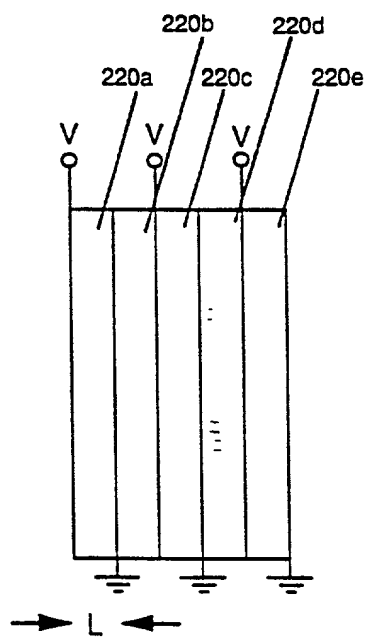


FIG. 17

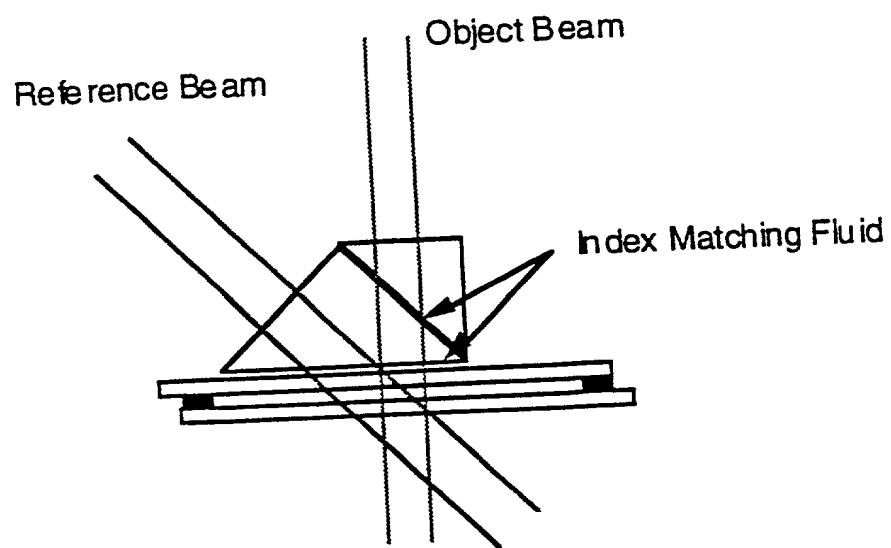


FIGURE 18

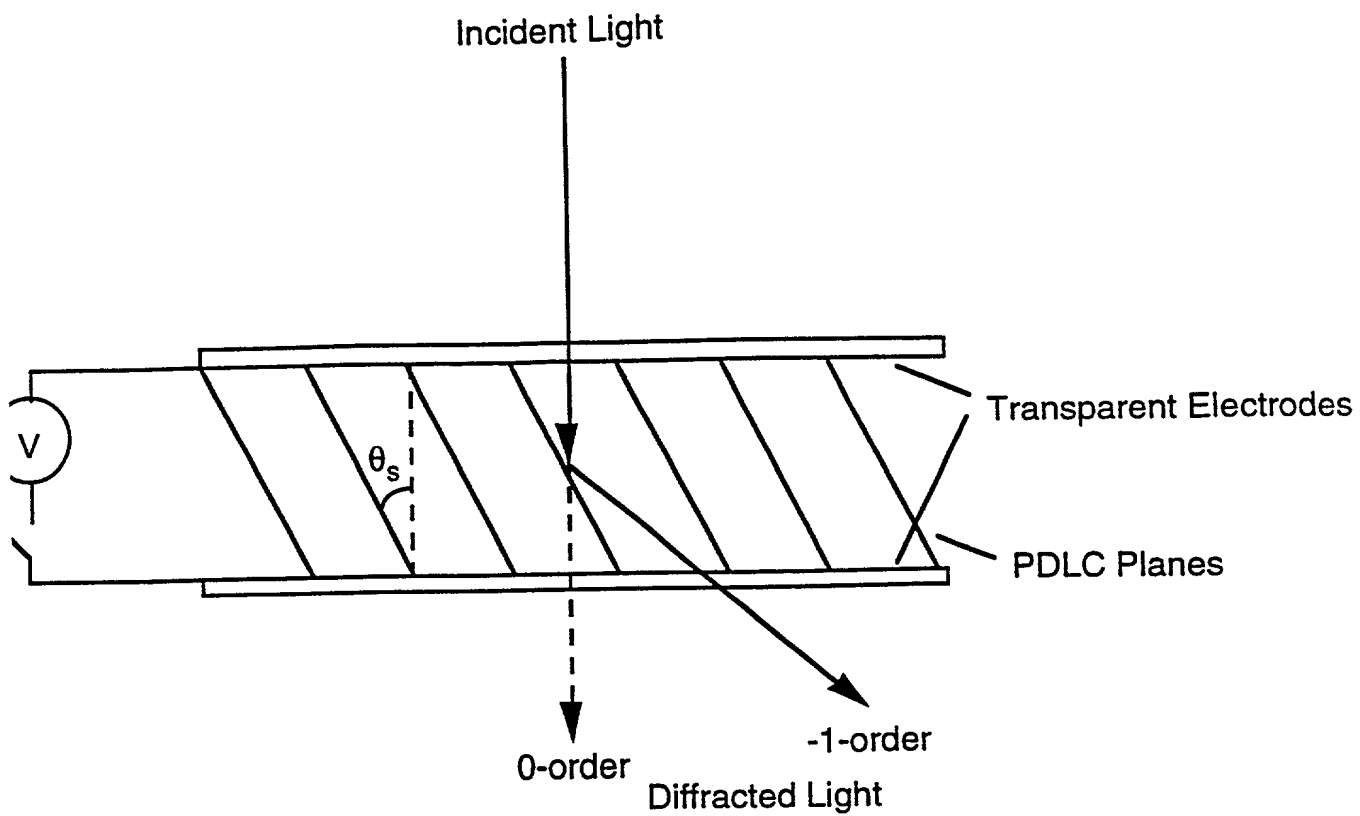


FIGURE 19

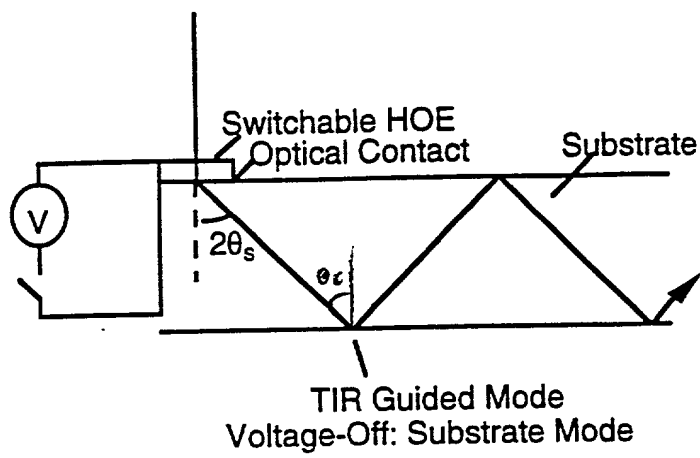


FIGURE 20





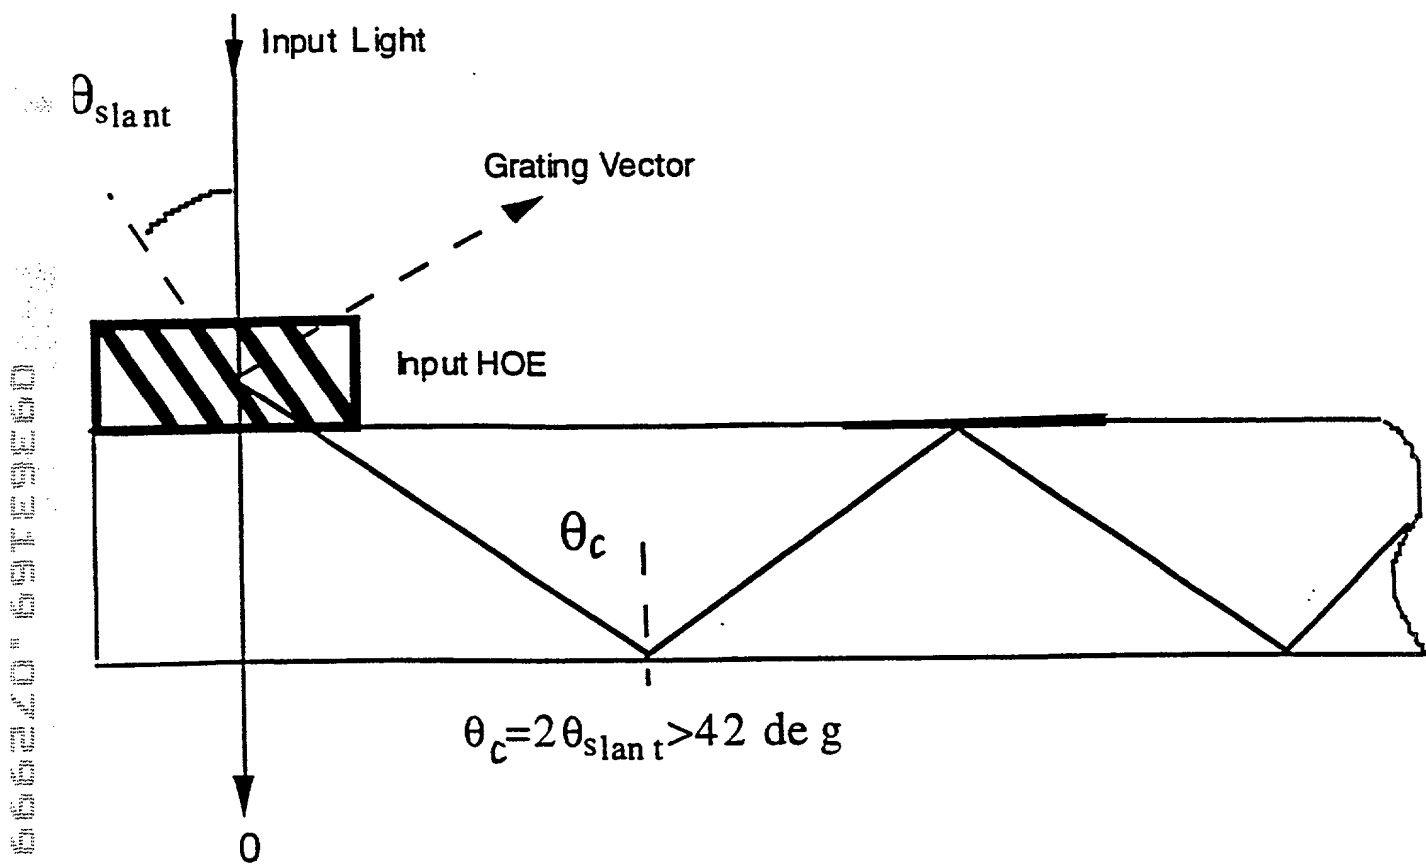


FIGURE 21

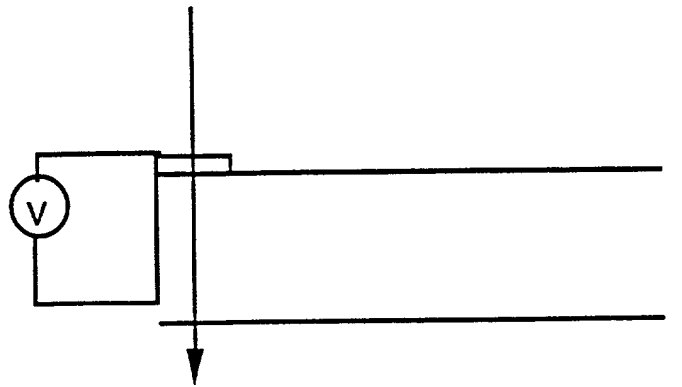


Voltage-On: Transmission Mode

FIGURE 22

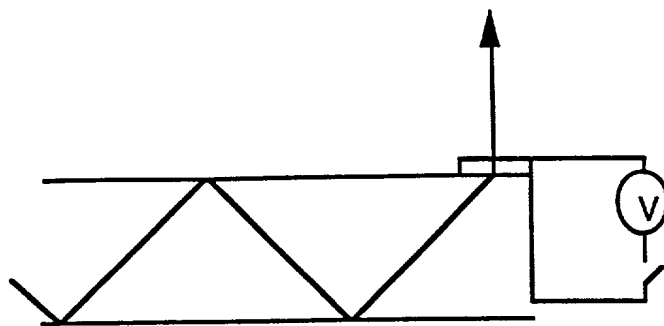

Voltage-Off: Switch-Out Mode

FIGURE 23

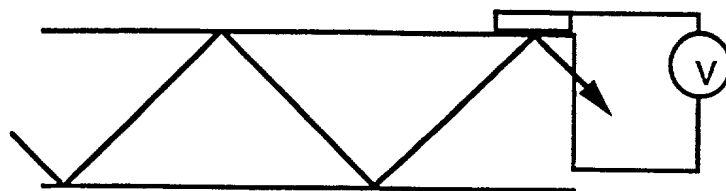

Voltage-On: Substrate Mode

FIGURE 24

656220-697980

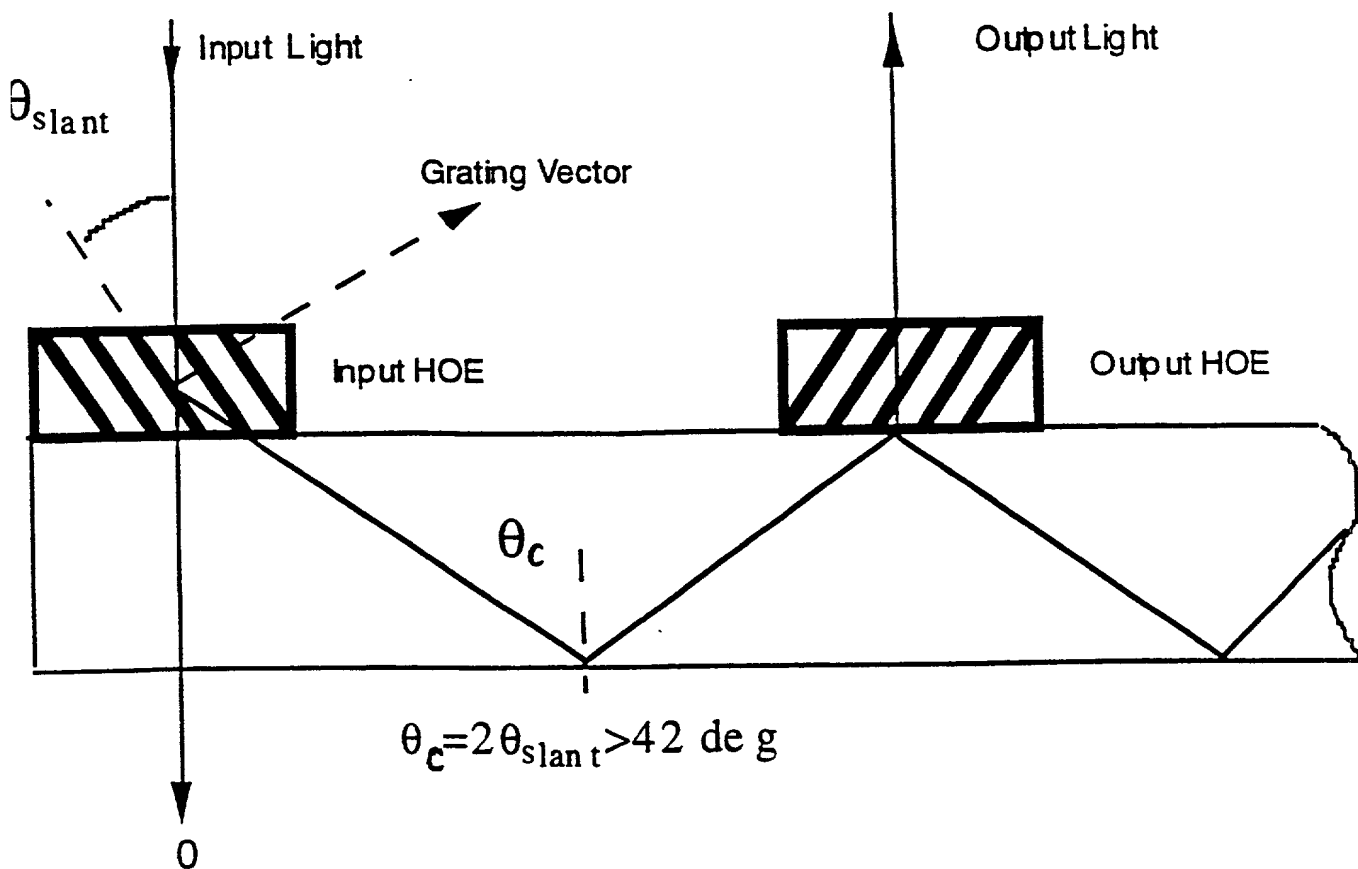


FIGURE 25

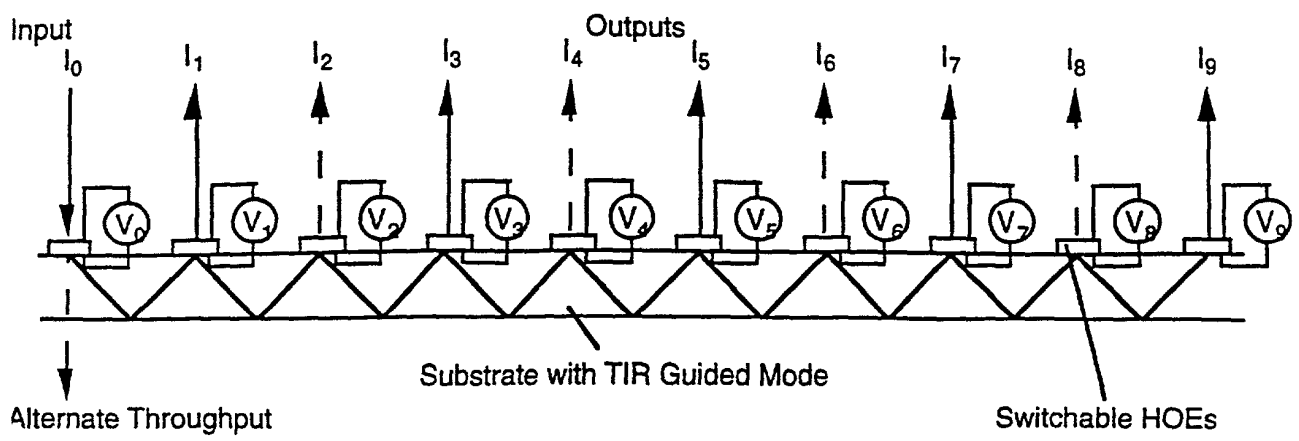


FIGURE 26

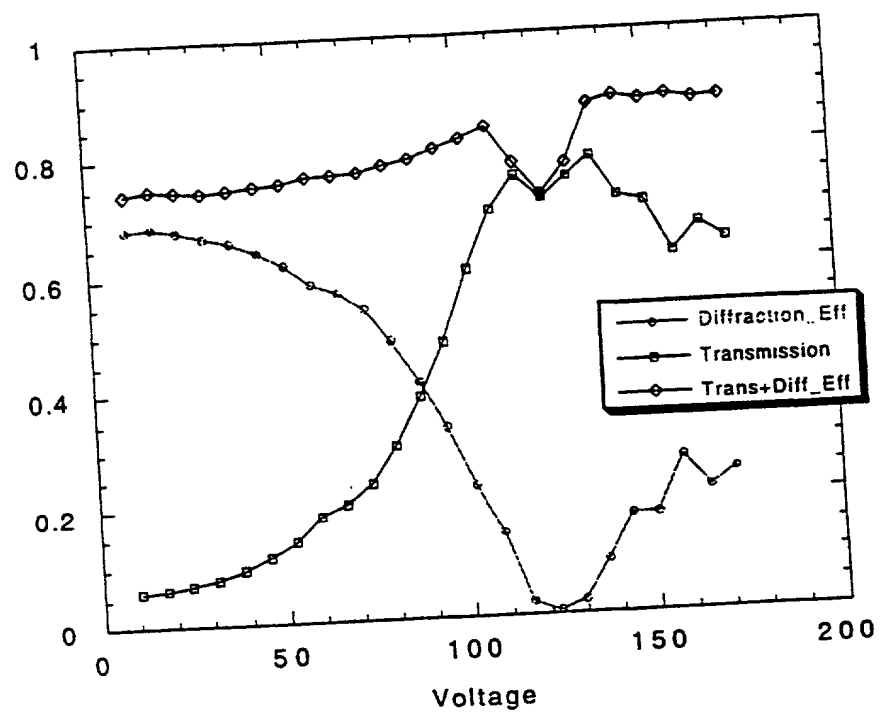


FIGURE 27

66220 69750

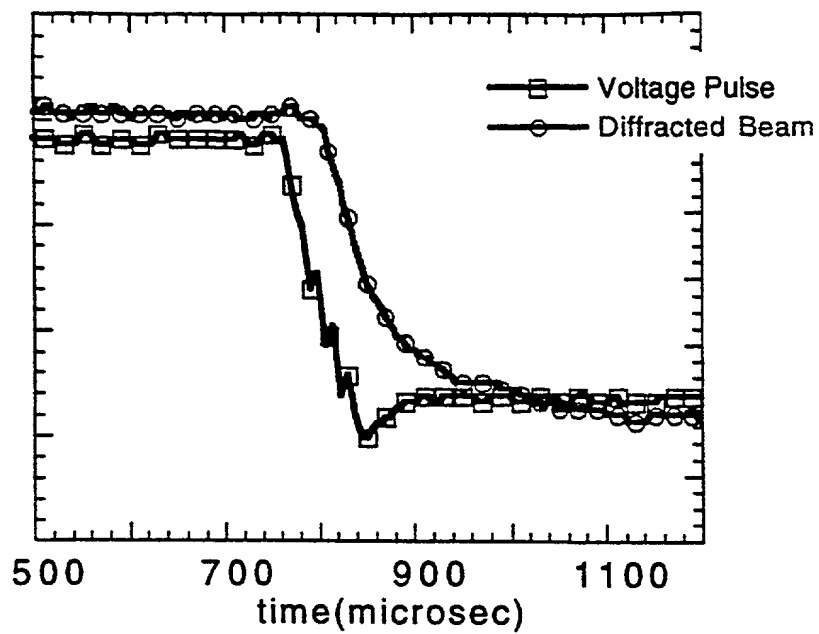


FIGURE 28



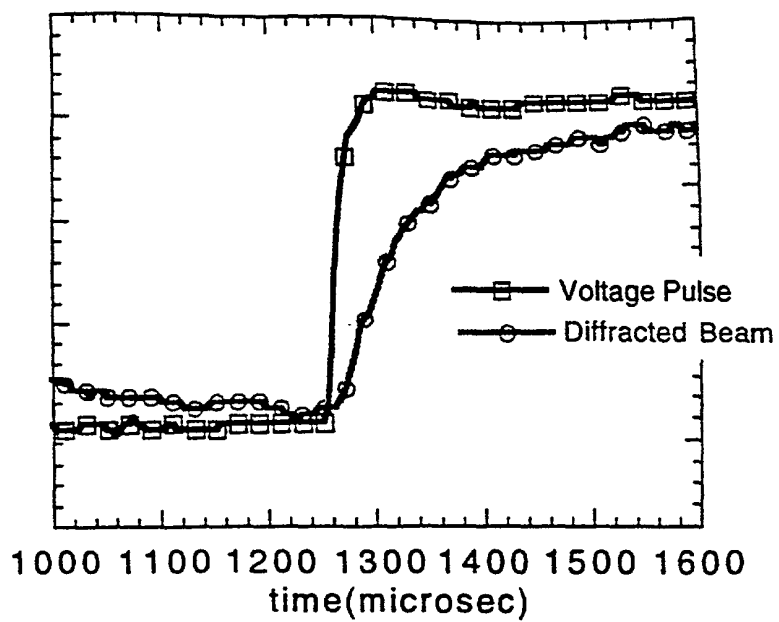


FIGURE 29

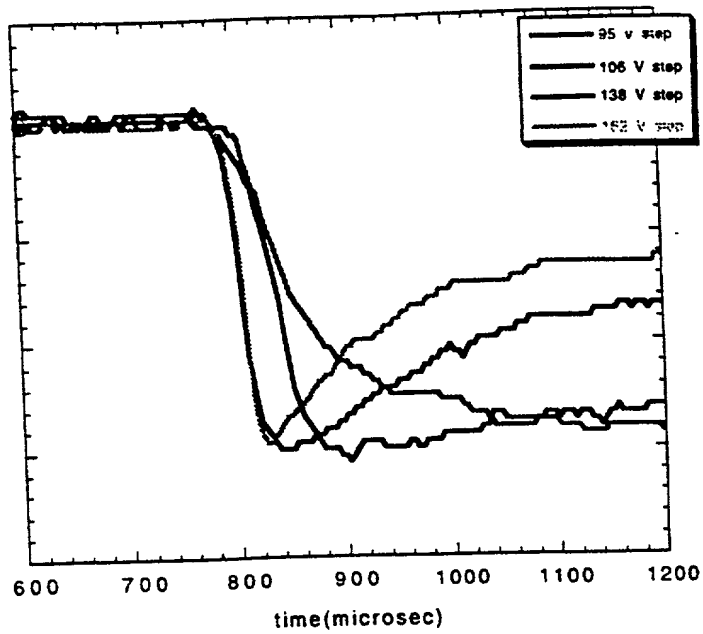


FIGURE 30

# DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION

## English Language Declaration

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled ELECTRICALLY SWITCHABLE POLYMER-DISPERSED LIQUID CRYSTAL MATERIALS INCLUDING SWITCHABLE OPTICAL COUPLERS AND RECONFIGURABLE OPTICAL INTERCONNECTS; the specification of which

☒ is attached hereto.

☐ was filed on \_\_\_\_\_ as

☐ Application Serial No. \_\_\_\_\_

☐ and was amended on \_\_\_\_\_ (if applicable)

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, §1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent of inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)	Priority Claimed
(Number)	(Country)
(Day/Month/Year Filed)	<div style="display: flex; justify-content: space-between;"> <span style="border-bottom: 1px solid black; width: 45%;">Yes</span> <span style="border-bottom: 1px solid black; width: 45%;">No</span> </div>
(Number)	(Country)
(Day/Month/Year Filed)	<div style="display: flex; justify-content: space-between;"> <span style="border-bottom: 1px solid black; width: 45%;">Yes</span> <span style="border-bottom: 1px solid black; width: 45%;">No</span> </div>

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code §112, I acknowledge the duty to disclose material to patentability as defined in Title 37, Code of Federal Regulations, §1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application:

60/094,578	July 29, 1998	Pending
(Application Serial No.)	(Filing Date)	(Status)
		(patented, pending, abandoned)
(Application Serial No.)	(Filing Date)	(Status)
		(patented, pending, abandoned)
(Application Serial No.)	(Filing Date)	(Status)
		(patented, pending, abandoned)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true, and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.



**English Language Declaration**




**POWER OF ATTORNEY:** As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith.

George T. Marcou, Registration No. 33,014; Richard Peterson, Registration No. 35,320; Charles W. Calkins, Registration No. 31,814; John M. Harrington, Registration No. 25,592; A. Jose Cortina, Registration No. 29,733; Russell Todd Morgan, Registration No. 43,815; James J. Bindseil, Reg. No. 42,326; Benjamin Driscoll, Registration No. 41,571; Yoncha L. Kundupoglu, Registration No. 41,130; R. Whitney Winston, Registration No. 44,432; John Ball, Registration No. 44,433; Dawn-Marie Bey, Registration No. 44,442; and Tiep Nguyen, Registration No. P-44,465.

Send Correspondence to:  
George T. Marcou  
Kilpatrick Stockton LLP  
Suite 800  
700 - 13th Street, N.W.  
Washington, D.C. 20005

Direct telephone calls to:  
George T. Marcou  
(202) 508-5800

Full name of sole or first inventor:	<b>Lalgudi V. NATARAJAN</b>
First Inventor's signature	Date
Residence:	<b>2341 Apricot Drive, Beavercreek, Ohio 45431</b>
Citizenship:	<b>U.S.A.</b>
Post Office Address:	<b>2341 Apricot Drive, Beavercreek, Ohio 45431</b>
	
Full name of second joint inventor:	<b>Richard L. SUTHERLAND</b>
Second Inventor's signature	Date
Residence:	<b>4447 Satellite Avenue, Dayton, Ohio 45415</b>
Citizenship:	<b>U.S.A.</b>
Post Office Address:	<b>4447 Satellite Avenue, Dayton, Ohio 45415</b>
	

Full name of second joint inventor:	<b>Vince P. TONDI GLIA</b>
Second Inventor's signature	Date
Residence:	<b>550 Elberon Avenue, Dayton, Ohio 45431</b>
Citizenship:	<b>U.S.A.</b>
Post Office Address:	<b>550 Elberon Avenue, Dayton, Ohio 45431</b>
	
Full name of second joint inventor:	<b>Timothy J. BUNNING</b>
Second Inventor's signature	Date
Residence:	<b>3106 Highland Drive, Beavercreek, Ohio 45432</b>
Citizenship:	<b>U.S.A.</b>
Post Office Address:	<b>3106 Highland Drive, Beavercreek, Ohio 45432</b>
	
Full name of second joint inventor:	<b>Bob EPLING</b>
Second Inventor's signature	Date
Residence:	<b>543 Rhondavu Ct., Waynesville, Ohio 45068</b>
Citizenship:	<b>U.S.A.</b>
Post Office Address:	<b>543 Rhondavu Ct., Waynesville, Ohio 45068</b>
	
Full name of second joint inventor:	<b>Donna M. BRANDELIK</b>
Second Inventor's signature	Date
Residence:	<b>883 Weinland Drive, New Carlisle, Ohio 45344</b>
Citizenship:	<b>U.S.A.</b>
Post Office Address:	<b>883 Weinland Drive, New Carlisle, Ohio 45344</b>
